

---

# **cookiecutter-python-package**

***Release 1.13.0***

**Konstantinos Lampridis**

**Feb 15, 2024**



**CONTENTS:**

<b>1</b>	<b>Python Package Generator</b>	<b>1</b>
1.1	What’s included? . . . . .	1
1.2	What to expect? . . . . .	2
1.3	Quickstart . . . . .	3
1.4	License . . . . .	4
1.5	Indices and tables . . . . .	24
	<b>Python Module Index</b>	<b>25</b>
	<b>Index</b>	<b>27</b>



## PYTHON PACKAGE GENERATOR

Generate Python Project and enjoy **streamlined “DevOps”** using a powerful **CI/CD Pipeline**.


**Documentation** available at <https://python-package-generator.readthedocs.io/>.

### 1.1 What’s included?

- **Generator of Python Project** (see [Quickstart](#)), with **CLI** for **Linux**, **MacOS**, and **Windows**
- **Option** to Generate Python Package designed as *module*, *module+cli*, or *pytest-plugin*!
- Scaffold over **24 files**, from [Template](#), to have a *ready-to-develop* **Project equipped** with:
  - Fully-featured **CI/CD Pipeline**, running on [Github Actions](#), defined in *.github/*
  - **Continuous Delivery** to *PyPI* (ie [pypi.org](#), [test.pypi.org](#)) and *Dockerhub*
  - **Continuous Integration**, with **Test Suite** running *pytest*, located in *tests* dir
  - **Continuous Documentation**, building with *mkdocs* or *sphinx*, and hosting on *readthedocs*, located in *docs* dir
  - **Static Type Checking**, using *mypy*
  - **Lint Check** and *Apply* commands, using the fast *Ruff* linter, along with standard *isort*, and *black*
  - **Build Command**, using the *build* python package

## 1.2 What to expect?

You can be up and running with a new Python Package, and run workflows on Github Actions, such as:

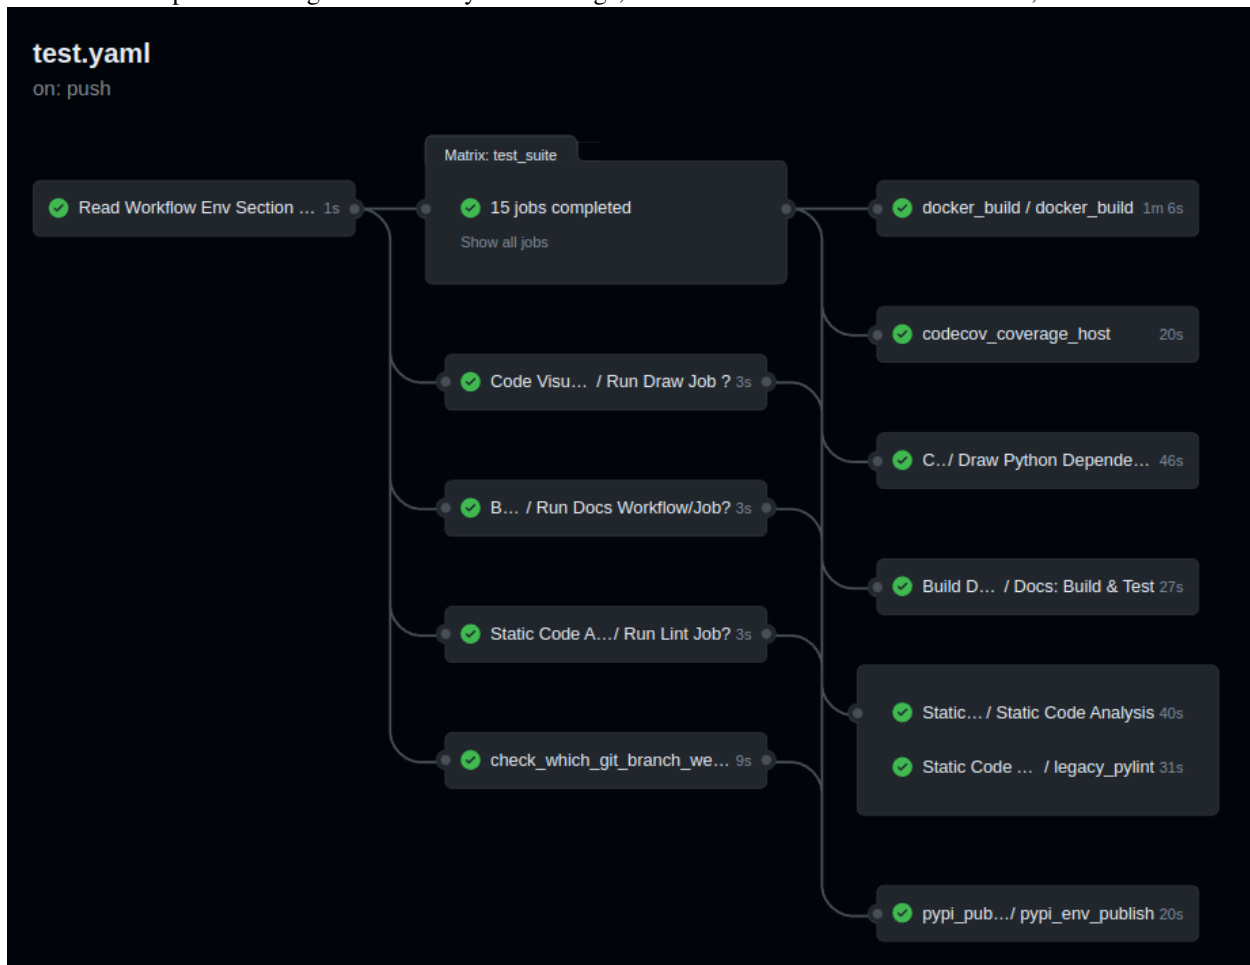

Link: <https://github.com/boromir674/biskotaki/actions/runs/4157571651>

1. **CI Pipeline**, running on Github Actions, defined in `.github/`
  - a. **Job Matrix**, spanning different *platform*'s and *python version*'s
    1. Platforms: *ubuntu-latest*, *macos-latest*
    2. Python Interpreters: *3.6*, *3.7*, *3.8*, *3.9*, *3.10*
  - b. **Parallel Job** execution, generated from the *matrix*, that runs the *Test Suite*
  - c. **Artifact** store of **Source** and **Wheel** Distributions, factoring Platform and Python Version

### 1.2.1 Auto Generated Sample Package Biskotaki

Check the **Biskotaki Python Package Project**, for a taste of the project structure and capabilities this Template can generate!

It is entirely generated using this **Python Package Template**:

**Source Code** hosted on *Github* at <https://github.com/boromir674/biskotaki>

**Python Package** hosted on *pypi.org* at <https://pypi.org/project/biskotaki/>

**CI Pipeline** hosted on *Github Actions* at <https://github.com/boromir674/biskotaki/actions>

## 1.3 Quickstart

To **install** the latest Generator in your environment, run:

```
pip install cookiecutter-python
```

The generate-python CLI should become available in your environment.

Next, create a file, let's call it `gen-config.yml`, with the following content:

```
default_context:
  project_name: Demo Generated Project
  project_type: module+cli
  full_name: John Doe
  email: john.doe@something.org
  github_username: john-doe
  project_short_description: 'Demo Generated Project Description'
  initialize_git_repo: no
  interpreters: {"supported-interpreters": ["3.8", "3.9", "3.10", "3.11"]}
```

To **generate** a Python Package Project, run:

```
mkdir gen-demo-dir
cd gen-demo-dir

generate-python --config-file ../gen-config.yml --no-input
```

Now, you should have generated a new Project for a Python Package, based on the [Template](#)!

The Project should be located in the newly created `demo-generated-project` directory.

To leverage all out-of-the-box development operations (ie scripts), install `tox`:

```
python3 -m pip install --user 'tox<4'
```

To verify `tox` available in your environment, run: `tox --version`

Please, do a `cd` into the newly created directory, ie `cd <my-great-python-package>`.

To run the Test Suite, `cd` into the newly created Project folder, and run:

```
tox -e dev
```

All Tests should pass, and you should see a *coverage* report!

To run Type Checking against the Source Code, run:

```
tox -e type
```

All Type Checks should pass!

To setup a Git Repository, run:

```
git init
git add .
git checkout -b main
git commit -m "Initial commit"
```

To setup a Remote Repository, run for example:

```
git remote add origin <remote-repository-url>
git push -u origin main
```

To trigger the CI/CD Pipeline, run:

```
git push
```

Navigate to your [github.com/username/your-repo/actions](https://github.com/username/your-repo/actions) page, to see the CI Pipeline running!

Develop your package's **Source Code** (*business logic*) inside *src/my\_great\_python\_package* dir :)

Develop your package's **Test Suite** (ie *unit-tests*, *integration tests*) inside *tests* dir :-)

Read the Documentation's [Use Cases](#) section for more on how to leverage your generated Python Package features.

### 1.3.1 Next Steps

To prepare for an Open Source Project Development Lifecycle, you should visit the following websites:

- PyPI, [test.pypi.org](https://test.pypi.org), Dockerhub, and Read the Docs, for setting up Release and Documentation Pipelines
- [github.com](https://github.com)/your-account to configure Actions, through the web UI
- Codecov, Codacy, and Codeclimate, for setting up Automated Code Quality, with CI Pipelines
- <https://www.bestpractices.dev/> for registering your Project for OpenSSF Best Practices Badge

**Happy Developing!**

## 1.4 License

- [GNU Affero General Public License v3.0](#)

### 1.4.1 Free/Libre and Open Source Software (FLOSS)

#### Introduction

This is **Cookiecutter Python Package**, a *Template Project* used to *generate* fresh new open source *Python Package*'s. The Template is implemented as a *cookiecutter* and it is available both as source code and as a Python Package in itself.

Goal of this project is to automate the process of creating a new Python Package, by providing the user with a “bootstrap” method,

to quickly set up all the *support* files required to seamlessly build and publish the package on [pypi.org](https://pypi.org) (the official Python Package Index public server).

Additionally, it instruments a basic **Test Suite**, multiple **Commands**, as well as a **CI** pipeline, with parallel execution of the *build matrix*, running on *Github Actions*.

This documentation aims to help people understand what are the features of the library and how they can use it. It presents some use cases and an overview of the library capabilities and overall design.



## Why this Generator?

*So, why choose this Python Package Generator?*

### Robust CLI

You want an *easy-to-use, cross-platform* CLI.

- It offers an **1-click** command, or option for an interactive *wizard*
- **Tested on 15 different setups**, across multiple *Platforms* and *Python Interpreters*
  - **OS:** {Ubuntu, MacOS, Windows} X **Python:** {3.7, 3.8, 3.9, 3.10, 3.11}
- Built on established software, such as *cookiecutter* and *jinja2*

### “DevOps”: aka Automations and CI/CD

You want to focus on your *business logic* and *test cases*, in new Python projects.

- Scaffolded project is **one push** away from triggering its **CI/CD pipeline** on Github Actions.
- **Continuous Deployment**, publishing at *pypi.org*, *Docker Hub*, and *Read The Docs*
- Designed for **GitOps**, supporting various *automated developer activities*
- **Automations** with same entrypoint for both **CI and Local** run, via *tox*
- Stress-Testing, with **Job Matrix** spanning multiple *Python Interpreters*, *Operating Systems*

### Approved Tooling

You want the best tools under your belt, for your development lifecycle.

- *tox*, *poetry*, *ruff*, *mypy*, *pytest*, *black*, *isort*, *mkddocs*, *sphinx*

### Template Variant

You want *poetry*, but what if you want to develop a *pytest plugin*?

- Generate *module*: a Python Distribution, with python API/sdk
  - configured with *poetry* backend
- Generate *module+cli*: a Python Distribution, with a CLI and a python API/sdk
  - configured with *poetry* backend
- Generate *pytest-plugin*: a Python Distribution, designed for a *pytest plugin*
  - configured with *setuptools* backend, as Required by *pytest*!

## Generate New Python Package Project

Our Python Generator **Project** was designed to be installable via *pip* and then invoked through the `generate-python` entrypoint to the CLI.

## Getting the CLI

**Cookiecutter Python Package**, available as *source code* on github, with published **Distribution** on *pypi.org* **PyPI**, and **Docker Image** on *hub.docker.com* **Registry**.

Install in virtual env, and make available globally in your (host) machine.

```
pipx install cookiecutter-python
```

Now, the `generate-python` executable should be available.  
Pull the latest Stable image from Docker Hub

```
docker pull boromir674/generate-python:master
```

Now, the CLI should be available, via  
`docker run -it --rm boromir674/generate-python:master`

---

**Hint:** Not to be confused with the ‘latest’ (channel) image tag advertised by dockerhub, which my no means promises to contain a stable release.

---

---

**Hint:** We promise stable releases on ‘**master**’ tag, since on git, ‘all tagged production releases are on ‘master’ branch. They are the same to correspond to PyPI Distributions as well.

---

Install in virtual env

```
virtualenv env --python=python3
source env/bin/activate

pip install cookiecutter-python
```

Make available to current user

```
ln -s env/bin/generate-python ~/.local/bin/generate-python
```

Now, the `generate-python` executable should be available (assuming `~/.local/bin` is in your PATH).

## Check installation

You can verify by running the following:

```
generate-python --version
```

---

**Hint:** All methods demonstrated for **getting the CLI**, *download* the **Latest Stable** (Release).

---

## Using the CLI

Using the cli is as simple as invoking *generate-python* from a console.

You can run the following to see all the available parameters you can control:

```
generate-python --help
```

```
docker run -it --rm boromir674/generate-python:master --help
```

The most common way to generate a new Python Package Project is to run:

```
generate-python
```

```
docker run -it --rm boromir674/generate-python:master
```

This will prompt you to input some values and create a fresh new Project in the current directory!

Now, simply *cd* into the generated Project's directory and enjoy some of the features the generator supplies new projects with!

More on use cases in the next section.

## Generated Python Project Use Cases

Ready to enjoy some of your newly generated Python Package Project **features** available out-of-the-box!?

For instance:

1. Leverage the supplied *tox environments* to automate various **Testing** and **DevOps** related activities.  
Assuming you have *tox* installed (example installation command: *python3 -m pip install --user tox*) and you have done a *cd* into the newly generated Project directory, you can do for example:
  - a. Run the **Test Suite** against different combinations of *Python versions* (ie 3.7, 3.8) and different ways of installing (ie 'dev', 'sdist', 'wheel') the *<my\_great\_python\_package>* package:

```
tox -e "py{3.7, 3.8}-{dev, sdist, wheel}"
```

- b. Check the code for **compliance** with **best practises** of the *Python packaging ecosystem* (ie PyPI, pip), build *sdist* and *wheel* distributions and store them in the *dist* directory:

```
tox -e check && tox -e build
```

- c. **Deploy** the package's distributions in a *pypi* (index) server:
    1. Deploy to **staging**, using the *test pypi* (index) server at [test.pypi.org](https://test.pypi.org):

```
TWINE_USERNAME=username TWINE_PASSWORD=password PACKAGE_DIST_VERSION=1.0.0_
↳ tox -e deploy
```

2. Deploy to **production**, using the *production pypi* (index) server at [pypi.org](https://pypi.org):

```
TWINE_USERNAME=username TWINE_PASSWORD=password PACKAGE_DIST_VERSION=1.0.0_
↳ PYPI_SERVER=pypi tox -e deploy
```

---

**Note:** Setting `PYPI_SERVER=pypi` indicates to deploy to *pypi.org* (instead of *test.pypi.org*).

---



---

**Note:** Please modify the `TWINE_USERNAME`, `TWINE_PASSWORD` and `PACKAGE_DIST_VERSION` environment variables, accordingly.

`TWINE_USERNAME` & `TWINE_PASSWORD` are used to authenticate (user credentials) with the targeted pypi server.

PACKAGE\_DIST\_VERSION is used to avoid accidentally uploading distributions of different versions than intended.

---

2. Leverage the **CI Pipeline** and its **build matrix** to run the **Test Suite** against a combination of different Platforms, different Python interpreter versions and different ways of installing the subject Python Package: *Trigger the **Test Workflow** on the **CI server**, by *pushing* a git commit to a remote branch (ie *master* on github).*  
*Navigate to the **CI Pipeline web interface** (hosted on *Github Actions*) and inspect the **build** results!*
- 

**Note:** You might have already *pushed*, in case you answered *yes*, in the *initialize\_git\_repo* prompt, while generating the Python Package, and in that case, the **Test Workflow** should have already started running! Out-of-the-box, *triggering* the **Test Workflow** happens only when pushing to the *master* or *dev* branch.

---

## References

Here, you will find the cookiecutter\_python's **Python API Reference Documentation**.

### cookiecutter\_python package

#### Subpackages

#### cookiecutter\_python.backend package

#### Subpackages

#### cookiecutter\_python.backend.error\_handling package

#### Submodules

#### cookiecutter\_python.backend.error\_handling.handler\_builder module

```
class cookiecutter_python.backend.error_handling.handler_builder.CriticalHandlerBuilder
    Bases: object
class cookiecutter_python.backend.error_handling.handler_builder.HandlerBuilder
    Bases: object
    subclasses: Dict[str, type] = {'critical': <class
    'cookiecutter_python.backend.error_handling.handler_builder.CriticalHandlerBuilder'>,
    'non-critical': <class 'cookiecutter_python.backend.error_handling.handler_builder.
    NonCriticalHandlerBuilder'>}}
class
cookiecutter_python.backend.error_handling.handler_builder.NonCriticalHandlerBuilder
    Bases: object
```

## Module contents

`class cookiecutter_python.backend.error_handling.HandlerBuilder`

Bases: object  
 subclasses: Dict[str, type] = {'critical': <class 'cookiecutter\_python.backend.error\_handling.handler\_builder.CriticalHandlerBuilder'>, 'non-critical': <class 'cookiecutter\_python.backend.error\_handling.handler\_builder.NonCriticalHandlerBuilder'>}

`cookiecutter_python.backend.generator package`

## Submodules

`cookiecutter_python.backend.generator.generator module`

## Module contents

`cookiecutter_python.backend.hosting_services package`

## Submodules

`cookiecutter_python.backend.hosting_services.check_engine module`

`class cookiecutter_python.backend.hosting_services.check_engine.Engine`(*config\_file: Union[None, str], default\_config: Union[None, bool], services\_info: Tuple, checker: cookiecutter\_python.backend.hosting\_services.checker.Checker, handlers: Dict[str, Callable] = NOTHING*)

Bases: object

**check**(*servers: List[str]*)

Request Future per supported server, for web hosting service checks  
 For each server the dedicated ‘checker’ is called, which tries to return a Future.  
 Returns None checker’s ‘activation’ boolean flag was off at runtime. Returns None if internal mechanism for determining server URL fails to derive the URL (atm URL is only tried to be read from User Config yaml)

**Parameters** *servers* (*List[str]*) – [description]

**Returns** [description]

**Return type** [type]

**checker:** `cookiecutter_python.backend.hosting_services.checker.Checker`

**config\_file:** `Union[None, str]`

**static create**(*config\_file: str, default\_config: bool*)

Initialize objects, for Asynchronous http with 3rd-party Services  
 Objects are designed to Ask PyPI and Read The Docs, if the soon to be generated package name, and readthedocs project slug are available.  
 These ‘Checker’ objects make asynchronous http requests to PyPI and RTD web servers, for non-blocking IO, and to avoid blocking the main thread.  
 Checkers are initialized as ‘Activated’ if User Config is given and Default Config is False.

Then each Checker (pypi, rtd) requires: - PyPI requires the 'pkg\_name' in User's yaml Config - RTD requires the 'readthedocs\_project\_slug' in User's yaml Config to derive the URLs for Future Requests

**Parameters**

- **config\_file** (*str*) – user's yaml config file
- **default\_config** (*bool*) – default config flag

**default\_config:** Union[None, bool]

**handle**(*request\_result*)

**handlers:** `cookiecutter_python.backend.hosting_services.handler.Handlers`

**services\_info:** Tuple

### cookiecutter\_python.backend.hosting\_services.check\_service module

```
class cookiecutter_python.backend.hosting_services.check_service.ServiceChecker(name_extractor:
    Callable[[str],
    str],
    web_service_checker:
    cookiecut-
    ter_python.backend.hosting_se
    acti-
    vate_flag:
    bool, con-
    fig_file_path:
    str)
```

Bases: object

**activate\_flag:** bool

**config\_file\_path:** str

**static create**(*hosting\_service\_info*, *activate\_flag:* bool, *config\_file\_path*)

**name\_extractor:** Callable[[str], str]

**property service\_name**

**web\_service\_checker:** `cookiecutter_python.backend.hosting_services.
 check_web_hosting_service.WebHostingServiceChecker`

### cookiecutter\_python.backend.hosting\_services.check\_web\_hosting\_service module

```
class cookiecutter_python.backend.hosting_services.check_web_hosting_service.WebHostingServiceChecker(url_getter:
    Callable[[str],
    str],
    CI_config_path:
    str)
```

Bases: object

Check if CI config is out-of-the-box ok to integrate with hosting services

**static create**(*hosting\_service*)

**url\_getter:** Callable[[str], str]

## cookiecutter\_python.backend.hosting\_services.checker module

```
class cookiecutter_python.backend.hosting_services.checker.Checker(config_file: Union[None,
                                                                    str], default_config:
                                                                    Union[None, bool],
                                                                    checkers: cookiecut-
                                                                    ter_python.backend.hosting_services.checkers.C

Bases: object
checkers: cookiecutter_python.backend.hosting_services.checkers.Checkers
config_file: Union[None, str]
default_config: Union[None, bool]
static from_hosting_info(config_file, default_config, hosting_infos)
    Activate Web Host Checks if user config and NOT default config
```

## cookiecutter\_python.backend.hosting\_services.checkers module

```
class cookiecutter_python.backend.hosting_services.checkers.Checkers(checkers:
                                                                    MutableMapping)

Bases: object
static from_hosting_info(hosting_infos, activate_flag, config_file)
```

## cookiecutter\_python.backend.hosting\_services.exceptions module

```
exception
cookiecutter_python.backend.hosting_services.exceptions.ContextVariableDoesNotExist

Bases: Exception
    Raised when a Context Variable does not exist, in a dict-like object.
```

## cookiecutter\_python.backend.hosting\_services.extract\_name module

```
class cookiecutter_python.backend.hosting_services.extract_name.NameExtractor(name_extractor:
                                                                    Callable[[Mapping],
                                                                    str])

Bases: object
    Extract Context Value, from a User's Config (YAML) file.
static create(hosting_service_info)
name_extractor: Callable[[Mapping], str]
```

## cookiecutter\_python.backend.hosting\_services.handle\_hosting\_service\_check module

```
class cookiecutter_python.backend.hosting_services.handle_hosting_service_check.CheckHostingServiceHandl

Bases: object
check_hosting_service: Callable[[str], bool]
```

```
package_name: str
service_name: str
```

### cookiecutter\_python.backend.hosting\_services.handler module

```
class cookiecutter_python.backend.hosting_services.handler.CheckHostingServiceResultHandler(service_name:
                                                                    str)
```

```
Bases: object
static is_future_response_200(result) → bool
service_name: str
```

```
class cookiecutter_python.backend.hosting_services.handler.Handlers(handlers: Mapping)
```

```
Bases: object
static from_checkers(checkers)
handlers: Mapping
```

### cookiecutter\_python.backend.hosting\_services.value\_extractor module

```
class cookiecutter_python.backend.hosting_services.value_extractor.BaseValueExtractor(key_name:
                                                                    str)
```

```
Bases: cookiecutter_python.backend.hosting_services.value_extractor.ValueExtractor
key_name: str
```

```
class cookiecutter_python.backend.hosting_services.value_extractor.ValueExtractor
```

```
Bases: object
```

### cookiecutter\_python.backend.hosting\_services.web\_hosting\_service module

```
class cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServiceInfo
```

```
Bases: object
create(*args, **kwargs)
    Factory method for creating WebHostingService instances.
    Raises NotImplementedError – [description]
property service
property variable_name: str
```

```
class cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServices
```

```
Bases: object
subclasses: Dict[str, type] = {'pypi': <class 'cookiecutter_python.backend.
hosting_services.web_hosting_service.PyPIServerFactory'>, 'readthedocs': <class
'cookiecutter_python.backend.hosting_services.web_hosting_service.
ReadTheDocsServerFactory'>}
```

```
class cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServicesInfo(*args)
```

```
Bases: software_patterns.subclass_registry.SubclassRegistry[cookiecutter_python.
backend.hosting_services.web_hosting_service.HostingServiceInfo]
```

```
class cookiecutter_python.backend.hosting_services.web_hosting_service.PyPIServerFactory
```

```
Bases:
cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServiceInfo
create(*args, **kwargs)
```

```
    Factory method for creating WebHostingService instances.
```

```
    Raises NotImplementedError – [description]
property variable_name: str
```



**class**

`cookiecutter_python.backend.hosting_services.web_hosting_service.ReadTheDocsServerFactory`

Bases:

`cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServiceInfo`

**create**(\*args, \*\*kwargs)

Factory method for creating WebHostingService instances.

**Raises** `NotImplementedError` – [description]

**property variable\_name:** `str`

**class** `cookiecutter_python.backend.hosting_services.web_hosting_service.URLGetter`(url\_pattern: `str`, service\_name: `str`)

Bases: `object`

**service\_name:** `str`

**url\_pattern:** `str`

**class** `cookiecutter_python.backend.hosting_services.web_hosting_service.WebHostingService`(url: `str`)

Bases: `object`

**static create**(url\_pattern: `str`, service\_name: `str`)

**url:** `cookiecutter_python.backend.hosting_services.web_hosting_service.URLGetter`

## Module contents

**class** `cookiecutter_python.backend.hosting_services.Engine`(config\_file: `Union[None, str]`, default\_config: `Union[None, bool]`, services\_info: `Tuple`, checker: `cookiecutter_python.backend.hosting_services.checker.Checker` = `NOTHING`, handlers: `cookiecutter_python.backend.hosting_services.handler.Handlers` = `NOTHING`)

Bases: `object`

**check**(servers: `List[str]`)

Request Future per supported server, for web hosting service checks

For each server the dedicated ‘checker’ is called, which tries to return a Future.

Returns None checker’s ‘activation’ boolean flag was off at runtime. Returns None if internal mechanism for determining server URL fails to derive the URL (atm URL is only tried to be read from User Config yaml)

**Parameters** `servers` (`List[str]`) – [description]

**Returns** [description]

**Return type** [type]

**checker:** `cookiecutter_python.backend.hosting_services.checker.Checker`

**config\_file:** `Union[None, str]`

**static create**(config\_file: `str`, default\_config: `bool`)

Initialize objects, for Asynchronous http with 3rd-party Services

Objects are designed to Ask PyPI and Read The Docs, if the soon to be generated package name, and readthedocs project slug are available.

These ‘Checker’ objects make asynchronous http requests to PyPI and RTD web servers, for non-blocking IO, and to avoid blocking the main thread.

Checkers are initialized as ‘Activated’ if User Config is given and Default Config is False.  
 Then each Checker (pypi, rtd) requires: - PyPI requires the ‘pkg\_name’ in User’s yaml Config - RTD  
 requires the ‘readthedocs\_project\_slug’ in User’s yaml Config  
 to derive the URLs for Future Requests

**Parameters**

- **config\_file** (*str*) – user’s yaml config file
- **default\_config** (*bool*) – default config flag

**default\_config:** Union[None, bool]

**handle**(*request\_result*)

**handlers:** *cookiecutter\_python.backend.hosting\_services.handler.Handlers*

**services\_info:** Tuple

**cookiecutter\_python.backend.sanitization package**

**Subpackages**

**cookiecutter\_python.backend.sanitization.string\_sanitizers package**

**Submodules**

**cookiecutter\_python.backend.sanitization.string\_sanitizers.base\_sanitizer module**

**class** cookiecutter\_python.backend.sanitization.string\_sanitizers.base\_sanitizer.  
**AbstractSanitizer**

Bases: *cookiecutter\_python.backend.sanitization.string\_sanitizers.base\_sanitizer.*  
*SanitizerInterface*, abc.ABC

**exception\_msg:** str

**abstract log\_message**(*error, data*) → Tuple

**verify:** Callable[[Any], None]

**class** cookiecutter\_python.backend.sanitization.string\_sanitizers.base\_sanitizer.**BaseSanitizer**(*verify:*  
*Callable[[Any], None],*  
*ex-*  
*cep-*  
*tion\_msg:*  
*str,*  
*log\_func:*  
*Callable[[str],*  
*Any],*  
*Tu-*  
*ple])*)

Bases: *cookiecutter\_python.backend.sanitization.string\_sanitizers.base\_sanitizer.*  
*AbstractSanitizer*

**exception\_msg:** str

**log\_message**(*error: str, data*) → Tuple

**verify:** Callable[[Any], None]

**class** cookiecutter\_python.backend.sanitization.string\_sanitizers.base\_sanitizer.  
**SanitizerInterface**

Bases: abc.ABC

Sanitizer for the Generator Input Parameters.

## cookiecutter\_python.backend.sanitization.string\_sanitizers.sanitize\_reg\_input module

```
class cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.BaseSanitizer(verify: Callable[[Any], None], exception_msg: str, log_message: Callable[[str, data] → Tuple, verify: Callable[[Any], None])

Bases: cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer.AbstractSanitizer
exception_msg: str
log_message(error: str, data) → Tuple
verify: Callable[[Any], None]
exception cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.InputValueError
Bases: Exception
```

## cookiecutter\_python.backend.sanitization.string\_sanitizers.sanitize\_reg\_module\_name module

```
class cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name.ModuleNameSanitizer

Bases: cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.RegExSanitizer
exception_msg = 'Expected a valid Python Module name value'
classmethod log_message(error, module) → Tuple[Union[str, Mapping], ...]
regex: t.ClassVar[Pattern] = re.compile('^[_a-zA-Z][_a-zA-Z0-9]+$')
cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name.sanitize_module_name
```

## cookiecutter\_python.backend.sanitization.string\_sanitizers.sanitize\_reg\_version module

```
class cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version.VersionSanitizer

Bases: cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.RegExSanitizer
exception_msg = 'Expected a Semantic Version value'
classmethod log_message(error, string) → Tuple[Union[str, Mapping], ...]
regex: t.ClassVar[Pattern] = re.compile('^(?P<major>0|[1-9]\\d*)\\.?(?P<minor>0|[1-9]\\d*)\\.?(?P<patch>0|[1-9]\\d*)(?:-(?P<prerelease>(?:0|[1-9]\\d*|\\d*[a-zA-Z-][0-9a-zA-Z-]*)?(?:\\.(?:0|[1-9]\\d*|\\d*[a-zA-Z-][0-9a-zA-Z-]*)*))?(?:\\+(?P<bu
```

```
cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version.sanitize_version(version:
                                                                    str)
                                                                    →
                                                                    None
```

## Module contents

### Submodules

#### cookiecutter\_python.backend.sanitization.input\_sanitization module

```
class cookiecutter_python.backend.sanitization.input_sanitization.Sanitize
    Bases: object
    property exceptions: Mapping[str, Union[Type[Exception], Tuple]]
    exceptions_map: Dict[str, List[Type[Exception]]] = {'interpreters': [<class
'cookiecutter_python.backend.sanitization.interpreters_support.
InvalidInterpretersError'>], 'module-name': [<class
'cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.
InputValueError'>], 'semantic-version': [<class
'cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.
InputValueError'>]}
    classmethod register_exception(sanitizer_identifier: str)
        Add an Exception to the sanitizers' expected exceptions registry.
        Parameters sanitizer_identifier (str) – [description]
    classmethod register_sanitizer(sanitizer_identifier: str)
        Add a callback to the sanitizers' registry.
        Parameters sanitizer_identifier (str) – [description]
    sanitizers_map: Dict[str, Callable[[Any], None]] = {'interpreters': <function
verify_input_interpreters>, 'module-name': <function sanitize_module_name>,
'semantic-version': <function sanitize_version>}
```

#### cookiecutter\_python.backend.sanitization.interpreters\_support module

```
exception
cookiecutter_python.backend.sanitization.interpreters_support.InvalidInterpretersError
    Bases: Exception
cookiecutter_python.backend.sanitization.interpreters_support.unsupported_interpreters(interpreters:
                                                                    Se-
                                                                    quence[str])
                                                                    →
                                                                    Iterator[str]
cookiecutter_python.backend.sanitization.interpreters_support.verify_input_interpreters(interpreters:
                                                                    Se-
                                                                    quence[str])
                                                                    →
                                                                    None
```

## Module contents

### Submodules

#### cookiecutter\_python.backend.check\_server\_result module

**class** cookiecutter\_python.backend.check\_server\_result.**CheckWebServerResult**

Bases: abc.ABC

Interface for checking the result of a web server request.

**abstract property future**

**abstract property name:** str

The name of the resource requested to search on the web server.

**Returns** the name of the resource (ie python package slug, rtd project)

**Return type** str

**abstract property service\_name:** str

The name of the web server.

**Returns** the name (slug) of the web server

**Return type** str

#### cookiecutter\_python.backend.gen\_docs\_common module

Internal configuration for Documentation Generation.

cookiecutter\_python.backend.gen\_docs\_common.**get\_docs\_gen\_internal\_config**() → Dict[str, str]

Derive the internal configuration for Documentation Generation.

**Information included:**

- the folder where we each docs builder will generate the docs. We locate the template folder for each docs builder, which is the Single Source of Truth for the docs builder's output folder.

#### cookiecutter\_python.backend.helpers module

cookiecutter\_python.backend.helpers.**parse\_context**(*config\_file: str*)

#### cookiecutter\_python.backend.load\_config module

**exception** cookiecutter\_python.backend.load\_config.**InvalidYamlFormatError**

Bases: Exception

**exception** cookiecutter\_python.backend.load\_config.**UserYamlDesignError**

Bases: Exception

cookiecutter\_python.backend.load\_config.**get\_interpreters\_from\_yaml**(*config\_file: str*) → Optional[Mapping[str, Sequence[str]]]

Parse the 'interpreters' variable out of the user's config yaml file.

**Parameters** **config\_file** (*str*) – path to the user's config yaml file

**Raises**

- **InvalidYamlFormatError** – if yaml parser fails to load the user's config
- **UserYamlDesignError** – if yaml does not contain the 'default\_context' key

**Returns**

**dictionary with interpreters as a sequence of strings**, mapped to the 'supported-interpreters' key

**Return type** GivenInterpreters

cookiecutter\_python.backend.load\_config.**load\_yaml**(*config\_file*) → MutableMapping

## cookiecutter\_python.backend.main module

`cookiecutter_python.backend.main.generate`(*no\_input=False, offline=False, extra\_context=None, replay=False, overwrite=False, output\_dir='.', config\_file=None, skip\_if\_file\_exists=False, default\_config=False, password=None, directory=None, checkout=None*) → str

Create Python Project, with CI/CD pipeline, from the project template.

Generate/Scaffold a new Python Project, including configuration enabling automations such as CI and

Continuous Delivery of Docker and Python ‘artifacts’, and Continuous Documentation of the Python Project.

## cookiecutter\_python.backend.post\_main module

**exception** `cookiecutter_python.backend.post_main.CheckWebServerError`

Bases: Exception

Raised on Connection Error, when Requesting a Web Server’s Future.

`cookiecutter_python.backend.post_main.post_main`(*request*)

Check if any CI ‘deployment’ (ie in pypi), would require minor tweak.

## cookiecutter\_python.backend.pre\_main module

`cookiecutter_python.backend.pre_main.pre_main`(*request*)

Do preparatory steps Generation process, by settings things as the Template Context.

**Parameters** **\*\*kwargs** – Arbitrary keyword arguments.

## cookiecutter\_python.backend.proxy module

**class** `cookiecutter_python.backend.proxy.BaseProxy`(*proxy\_subject: software\_patterns.proxy.ProxySubject*)

Bases: `software_patterns.proxy.Proxy`[`cookiecutter_python.backend.proxy.T`],

`Generic`[`cookiecutter_python.backend.proxy.T`]

**static log\_info\_args**(*message: str, \*args, \*\*kwargs*) → Tuple[str, str]

## cookiecutter\_python.backend.request module

**class** `cookiecutter_python.backend.request.Request`(*\*, config\_file: str, default\_config: bool, web\_servers: List[str], no\_input: bool, extra\_context: dict, check: Optional[Any] = None, check\_results: Union[None, Iterable[cookiecutter\_python.backend.check\_server\_result.CheckWebServerResult]] = None, offline: bool = False*)

Bases: object

**check:** Any

**check\_results:** Union[None, Iterable[`cookiecutter_python.backend.check_server_result.CheckWebServerResult`]]

**config\_file:** str

**default\_config:** bool

**extra\_context:** dict

**no\_input:** bool

**offline:** bool

**web\_servers:** List[str]

## cookiecutter\_python.backend.user\_config\_proxy module

### Module contents

**exception** cookiecutter\_python.backend.**CheckWebServerError**

Bases: Exception

Raised on Connection Error, when Requesting a Web Server's Future.

cookiecutter\_python.backend.**generate**(*no\_input=False, offline=False, extra\_context=None, replay=False, overwrite=False, output\_dir='.', config\_file=None, skip\_if\_file\_exists=False, default\_config=False, password=None, directory=None, checkout=None*) → str

Create Python Project, with CI/CD pipeline, from the project template.

Generate/Scaffold a new Python Project, including configuration enabling automations such as CI and

Continuous Delivery of Docker and Python 'artifacts', and Continuous Documentation of the Python Project.

cookiecutter\_python.backend.**get\_docs\_gen\_internal\_config**() → Dict[str, str]

Derive the internal configuration for Documentation Generation.

**Information included:**

- the folder where we each docs builder will generate the docs. We locate the template folder for each docs builder, which is the Single Source of Truth for the docs builder's output folder.

## cookiecutter\_python.handle package

### Subpackages

### cookiecutter\_python.handle.dialogs package

### Subpackages

### cookiecutter\_python.handle.dialogs.lib package

### Submodules

### cookiecutter\_python.handle.dialogs.lib.project\_name module

**class** cookiecutter\_python.handle.dialogs.lib.project\_name.**ProjectNameDialog**

Bases: object

**dialog**(*cookie\_vars*) → Mapping[str, str]

### Module contents

**class** cookiecutter\_python.handle.dialogs.lib.**InteractiveDialog**

Bases: object

**subclasses** = {'project-name': <class 'cookiecutter\_python.handle.dialogs.lib.project\_name.ProjectNameDialog'>}

## Submodules

### cookiecutter\_python.handle.dialogs.dialog module

```
class cookiecutter_python.handle.dialogs.dialog.Dialog
    Bases: object
    abstract dialog(*args, **kwargs)
class cookiecutter_python.handle.dialogs.dialog.DialogRegistry(*args)
    Bases: software_patterns.subclass_registry.SubclassRegistry[cookiecutter_python.handle.dialogs.dialog.Dialog]
class cookiecutter_python.handle.dialogs.dialog.InteractiveDialog
    Bases: object
    subclasses = {'project-name': <class
'cookiecutter_python.handle.dialogs.lib.project_name.ProjectNameDialog'>}
```

## Module contents

```
class cookiecutter_python.handle.dialogs.InteractiveDialog
    Bases: object
    subclasses = {'project-name': <class
'cookiecutter_python.handle.dialogs.lib.project_name.ProjectNameDialog'>}
```

## Submodules

### cookiecutter\_python.handle.interactive\_cli\_pipeline module

Handles sequence of Interactive User Dialogs, for Context Information.

```
class cookiecutter_python.handle.interactive_cli_pipeline.InteractiveDialogsPipeline
    Bases: object
    Handles sequence of Interactive User Dialogs, for Context Information.
    dialogs = ['project-name']
    process(request)
        Process sequence of Interactive User Dialogs, for Context Information.
```



### cookiecutter\_python.handle.node\_base module

```
class cookiecutter_python.handle.node_base.DialogNode(dialog)
    Bases: cookiecutter_python.handle.node_interface.Node[List, Mapping[str, Any]]
    Handles a single Interactive User Dialog, for Context Information.
    process(request)
        Process a single Interactive User Dialog, for Context Information.
```

### cookiecutter\_python.handle.node\_factory module

```
class cookiecutter_python.handle.node_factory.NodeFactory
    Bases: object
    static create(dialog_name: str)
```

### cookiecutter\_python.handle.node\_interface module

```
class cookiecutter_python.handle.node_interface.Node
    Bases: abc.ABC, Generic[cookiecutter_python.handle.node_interface.T,
    cookiecutter_python.handle.node_interface.TT]
    abstract process(request: cookiecutter_python.handle.node_interface.T) →
        Optional[cookiecutter_python.handle.node_interface.TT]
```

## Module contents

### cookiecutter\_python.hooks package

#### Submodules

#### cookiecutter\_python.hooks.post\_gen\_project module

Post Cookie Hook: Templated File with jinja2 syntax  
 Cookiecutter post generation hook script that handles operations after the template project is used to generate a target project.

```
cookiecutter_python.hooks.post_gen_project.CLI_ONLY(x)
cookiecutter_python.hooks.post_gen_project.PYTEST_PLUGIN_ONLY(x)
exception cookiecutter_python.hooks.post_gen_project.PostFileRemovalError
    Bases: Exception
    cookiecutter_python.hooks.post_gen_project.get_context() → collections.OrderedDict
        Get the Context, that was used by the Templating Engine at render time
    cookiecutter_python.hooks.post_gen_project.get_request()
    cookiecutter_python.hooks.post_gen_project.git_commit(request)
        Commit the staged changes in the generated project.
    cookiecutter_python.hooks.post_gen_project.initialize_git_repo(project_dir: str)
        Initialize the Git repository in the generated project.
    cookiecutter_python.hooks.post_gen_project.is_git_repo_clean(project_directory: str) → bool
        Check to confirm if the Git repository is clean and has no uncommitted changes. If its clean return True
        otherwise False.
    cookiecutter_python.hooks.post_gen_project.iter_files(request)
    cookiecutter_python.hooks.post_gen_project.main()
        Delete irrelevant to Project Type files and optionally do git commit.
```

`cookiecutter_python.hooks.post_gen_project.post_file_removal(request)`

Preserve only files relevant to Project Type requested to Generate.

Delete files that are not relevant to the project type requested to generate.

For example, if the user requested a ‘module’ project type, then delete the files that are only relevant to a ‘module+cli’ project.

**Parameters** `request` ([*type*]) – [description]

`cookiecutter_python.hooks.post_gen_project.post_hook()`

Delete irrelevant to Project Type files and optionally do git commit.

`cookiecutter_python.hooks.post_gen_project.run_process_python36_n_below(*args, **kwargs)`

`cookiecutter_python.hooks.post_gen_project.run_process_python37_n_above(*args, **kwargs)`

`cookiecutter_python.hooks.post_gen_project.subprocess_run(*args, **kwargs)`

## **cookiecutter\_python.hooks.pre\_gen\_project module**

Pre Cookie Hook: Templated File with jinja2 syntax

**exception** `cookiecutter_python.hooks.pre_gen_project.InputSanitizationError`

Bases: `Exception`

`cookiecutter_python.hooks.pre_gen_project.get_request()`

`cookiecutter_python.hooks.pre_gen_project.hook_main(request)`

`cookiecutter_python.hooks.pre_gen_project.input_sanitization(request)`

`cookiecutter_python.hooks.pre_gen_project.main()`

## **Module contents**

### **Submodules**

#### **cookiecutter\_python.cli module**

Main *cookiecutter\_python* CLI.

`cookiecutter_python.cli.version_msg()`

Message about Python Generator version, location and Python version.

#### **cookiecutter\_python.cli\_handlers module**

`cookiecutter_python.cli_handlers.handle_error(error)`

#### **cookiecutter\_python.exceptions module**

`cookiecutter_python.exceptions.error_2_str(error)`

#### **cookiecutter\_python.utils module**

`cookiecutter_python.utils.load(interface: Type[cookiecutter_python.utils.T], module: Optional[str] = None) → List[Type[cookiecutter_python.utils.T]]`

Dynamically import all class objects that implement the given interface.

The classes (class objects) are discovered and imported in the namespace, by searching within each module found inside the input ‘dire’ (path) directory.

Each class object is an attribute found in a module’s namespace. We classify an attribute as a (correct) “class to import”, if the following python boolean expression evaluates to True:

`isclass(attribute)` and `issubclass(attribute, interface)`

If ‘dire’ is not given then we consider the modules that are inside the same directory as the one where the module of the invoking code resides.

**Parameters**

- **interface** (*Type[T]*) – the type (ie class) that the imported classes should ‘inherit’ (subclass) from
- **module** (*str*) – module containing the modules to inspect. Defaults to the same module (directory) as the one where the module of the invoking code resides.

**Module contents****Developer’s Corner**

Here we offer **Guides** on how to leverage the **CI/CD** to do various Development Operations, in a **GitOps** way.

**GitOps Guides****Streamline Documentation Updates**

1. Branch off *main* Branch, and checkout your *topical branch* (*tb*).
2. Create Docs-only changes and commit them to your *tb*.
3. Push git tag *quick-release*, to trigger the Docs Release Workflow, on the CI

A new PR, is expected to **open** from *tb* to a *dedicated docs* branch, and automatically **merge** if Docs Build passed on *rd* CI.

Then, a new PR, is expected to **open** from *dedicated docs* branch to *main*, with extra commits with Sem Ver Bump, and Changelog updates.

4. Wait for second PR to open, go to github web IU to review it, and merge it.

A new **tag** is expected to be created (on the new main/master commit), and a *PyPI* distribution will be uploaded, a new Docker Image on Dockerhub, and a new Github Release will be created.

**Workflows References**

- `quick-docs.yaml` : Listens to `quick-release` git tag, and merges *tb* → *db*, after opening PR.

**Release Candidate / Test Deployment**

From your branch, run

```
rc_tag=$(grep -E -o '^version\s*=\s*\".*\"' pyproject.toml | cut -d'"' -f2)
rc_tag="${rc_tag}-rc"

git tag "$git_tag" || (git tag -d "$git_tag" && git tag "$git_tag")
git push origin -d "$git_tag"; git push origin "$git_tag"
```

This will, trigger the CI/CD Pipeline and instruct it to do a Test Deployment.

Test Deployment is a full deployment of the package to the test environment.

And is the closest thing to a real (production) deployment.

The CI/CD Pipeline will:

1. make wheel builds (and unit test them) for the package using a Job Matrix factoring OS x Py Versions
2. Do as normal measuring of Code Coverage, Static Code Analysis, Docker Build
3. Publish Python Wheel Distribution in Test Environment, at test.pypi.org

## Docker Build

### Dockerfile - Build Process

## 1.5 Indices and tables

- [genindex](#)
- [modindex](#)
- [search](#)

## PYTHON MODULE INDEX

### C

- `cookiecutter_python`, 23
- `cookiecutter_python.backend`, 19
  - `check_server_result`, 17
  - `error_handling`, 9
    - `handler_builder`, 8
  - `gen_docs_common`, 17
  - `generator`, 9
    - `generator.generator`, 9
  - `helpers`, 17
  - `hosting_services`, 19
    - `check_engine`, 9
    - `check_service`, 10
    - `check_web_hosting_service`, 10
    - `checker`, 11
    - `checkers`, 11
    - `exceptions`, 11
    - `extract_name`, 11
    - `handle_hosting_service_check`, 11
    - `handler`, 12
    - `value_extractor`, 12
    - `web_hosting_service`, 12
  - `load_config`, 17
  - `main`, 18
  - `post_main`, 18
  - `pre_main`, 18
  - `proxy`, 18
  - `request`, 18
  - `sanitization`, 17
    - `input_sanitization`, 16
    - `interpreters_support`, 16
    - `string_sanitizers`, 16
      - `base_sanitizer`, 14
      - `sanitize_reg_input`, 15
      - `sanitize_reg_module_name`, 15
      - `sanitize_reg_version`, 15
  - `user_config_proxy`, 19
- `cookiecutter_python.cli`, 22
- `cookiecutter_python.cli_handlers`, 22
- `cookiecutter_python.exceptions`, 22
- `cookiecutter_python.handle`, 21
  - `dialogs`, 20
    - `dialog`, 20
    - `lib`, 19
      - `project_name`, 19
  - `interactive_cli_pipeline`, 20
  - `node_base`, 21
  - `node_factory`, 21
  - `node_interface`, 21
- `cookiecutter_python.hooks`, 22
  - `post_gen_project`, 21
  - `pre_gen_project`, 22
- `cookiecutter_python.utils`, 22



## INDEX

## A

**A** [module](#), 9

[AbstractSanitizer](#) (class in [cookiecutter\\_python.backend.sanitizer.string\\_sanitizers.base\\_sanitizer](#)), 14

[activate\\_flag](#) ([cookiecutter\\_python.backend.hosting\\_services.check\\_service.ServiceChecker](#) attribute), 10

[module](#), 8

[cookiecutter\\_python.backend.gen\\_docs](#) common

## B

Symbol	Module	Line
B	module,	17
BaseProxy	(class in <code>cookiecutter_python.backend.proxy</code> ),	18
BaseSanitizer	(class in <code>cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer</code> ),	14
BaseSanitizer	(class in <code>cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input</code> ),	15
BaseValueExtractor	(class in <code>cookiecutter_python.backend.hosting_services.value_extractor</code> ),	12
	<code>cookiecutter_python.backend.helpers</code>	

## C

C

check (cookiecutter\_python.backend.request.Request attribute), 18

check() (cookiecutter\_python.backend.hosting\_services.check\_engine.Engine method), 9

check() (cookiecutter\_python.backend.hosting\_services.Engine method), 9

check\_hosting\_service (cookiecutter\_python.backend.hosting\_services.check\_service.CheckHostingServiceHandler attribute), 11

check\_results (cookiecutter\_python.backend.request.Request attribute), 18

Checker (class in cookiecutter\_python.backend.hosting\_services.checker), 11

checker (cookiecutter\_python.backend.hosting\_services.check\_engine.Engine attribute), 9

checker (cookiecutter\_python.backend.hosting\_services.Engine attribute), 13

Checkers (class in cookiecutter\_python.backend.hosting\_services.checkers), 11

checkers (cookiecutter\_python.backend.hosting\_services.checker.Checker attribute), 11

CheckHostingServiceHandler (class in cookiecutter\_python.backend.hosting\_services.exceptions), 11

cookiecutter\_python.backend.hosting\_services.handle\_hosting\_service.check (cookiecutter\_python.backend.hosting\_services.handler), 12

CheckHostingServiceResultHandler (class in cookiecutter\_python.backend.hosting\_services.handle\_hosting\_result), 17

CheckWebServerError, 18, 19

CheckWebServerResult (class in cookiecutter\_python.backend.hosting\_services.handler), 9

CLI\_ONLY() (in module cookiecutter\_python.hooks.post\_gen\_project), 21

config\_file (cookiecutter\_python.backend.hosting\_services.check\_engine.Engine attribute), 9

config\_file (cookiecutter\_python.backend.hosting\_services.checker.Checker attribute), 11

config\_file (cookiecutter\_python.backend.hosting\_services.Engine attribute), 13

config\_file (cookiecutter\_python.backend.request.Request attribute), 18

config\_file\_path (cookiecutter\_python.backend.hosting\_services.check\_service.ServiceChecker attribute), 10

ContextVariableDoesNotExist, 11

cookiecutter\_python

module, 23

cookiecutter\_python.backend

module, 19

cookiecutter\_python.backend.check\_server\_result

module, 17

cookiecutter\_python.backend.error\_handling

module, 17

cookiecutter\_python.backend.hosting\_services

module, 13

cookiecutter\_python.backend.hosting\_services.check\_engine

module, 9

cookiecutter\_python.backend.hosting\_services.check\_service

module, 10

cookiecutter\_python.backend.hosting\_services.check\_web\_hosting\_service

module, 18

cookiecutter\_python.backend.hosting\_services.checker

module, 11

cookiecutter\_python.backend.hosting\_services.checkers

module, 11

cookiecutter\_python.backend.hosting\_services.exceptions

module, 11

cookiecutter\_python.backend.hosting\_services.extract\_name

module, 12

cookiecutter\_python.backend.hosting\_services.handle\_hosting\_result

module, 17

cookiecutter\_python.backend.hosting\_services.handler

module, 9

cookiecutter\_python.backend.hosting\_services.value\_extractor

module, 13

cookiecutter\_python.backend.hosting\_services.web\_hosting\_service

module, 12

cookiecutter\_python.backend.load\_config

module, 17

cookiecutter\_python.backend.main

module, 18

cookiecutter\_python.backend.post\_main

module, 18

cookiecutter\_python.backend.pre\_main

```
module, 18  
cookiecutter_python.backend.proxy  
    module, 18  
cookiecutter_python.backend.request  
    module, 18  
cookiecutter_python.backend.sanitization  
    module, 17  
cookiecutter_python.backend.sanitization.i  
    module, 16  
cookiecutter_python.backend.sanitization.i  
    module, 16  
cookiecutter_python.backend.sanitization.s  
    module, 16  
cookiecutter_python.backend.sanitization.s  
    module, 14  
cookiecutter_python.backend.sanitization.s  
    module, 15  
cookiecutter_python.backend.sanitization.s  
    module, 15  
cookiecutter_python.backend.sanitization.s  
    module, 15  
cookiecutter_python.backend.user_config_pro  
    module, 19  
cookiecutter_python.cli  
    module, 22  
cookiecutter_python.cli_handlers  
    module, 22  
cookiecutter_python.exceptions  
    module, 22  
cookiecutter_python.handle  
    module, 21  
cookiecutter_python.handle.dialogs  
    module, 20  
cookiecutter_python.handle.dialogs.dialog  
    module, 20  
cookiecutter_python.handle.dialogs.lib  
    module, 19  
cookiecutter_python.handle.dialogs.lib.pro  
    module, 19  
cookiecutter_python.handle.interactive_cli.  
    module, 20  
cookiecutter_python.handle.node_base  
    module, 21  
cookiecutter_python.handle.node_factory  
    module, 21  
cookiecutter_python.handle.node_interface  
    module, 21  
cookiecutter_python.hooks  
    module, 22  
cookiecutter_python.hooks.post_gen_project  
    module, 21  
cookiecutter_python.hooks.pre_gen_project  
    module, 22  
cookiecutter_python.utils
```

[illegible]

F

```
from_checkers() (cookiecutter_python.backend.hosting_services.handlers.  
from_hosting_info() (cookiecutter_python.backend.hosting_services.handlers.  
from_hosting_info() (cookiecutter_python.backend.hosting_services.handlers.  
future (cookiecutter_python.backend.check_server_result.CheckWebServer
```



## G

**G**

- `generate()` (in module `cookiecutter_python.backend`), 19
- `generate()` (in module `cookiecutter_python.backend.main`), 19
- `get_context()` (in module `cookiecutter_python.hooks.post_gen_project`), 21
- `get_docs_gen_internal_config()` (in module `cookiecutter_python.backend`), 19
- `get_docs_gen_internal_config()` (in module `cookiecutter_python.backend.gen_docs_common`), 17
- `get_interpreters_from_yaml()` (in module `cookiecutter_python.backend.load_config`), 17
- `get_request()` (in module `cookiecutter_python.hooks.post_gen_project`), 21
- `get_request()` (in module `cookiecutter_python.hooks.pre_gen_project`), 22
- `git_commit()` (in module `cookiecutter_python.hooks.post_gen_project`), 21

**H**

- `main()` (in module `cookiecutter_python.hooks.pre_gen_project`), 22
- `module`

## H

```

handle() (cookiecutter_python.backend.hosting_services.check_engine.Engine method), 13
handle() (cookiecutter_python.backend.hosting_services.Engine method), 14
handle_error() (in module cookiecutter_python.cli_handlers), 17
HandlerBuilder (class in cookiecutter_python.backend.error_handling), 9
HandlerBuilder (class in cookiecutter_python.backend.error_handling.handler_builder), 8
Handlers (class in cookiecutter_python.backend.hosting_services.handler), 10
handlers (cookiecutter_python.backend.hosting_services.check_engine.Engine attribute), 10
handlers (cookiecutter_python.backend.hosting_services.Engine attribute), 14
handlers (cookiecutter_python.backend.hosting_services.handler.Handlers attribute), 12
hook_main() (in module cookiecutter_python.hooks.pre_gen_project), 22
HostingServiceInfo (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12
HostingServices (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12
HostingServicesInfo (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12

```

## 1

```

initialize_git_repo() (in module cookiecutter_python.hooks.post_gen_project), 21
input_sanitization() (in module cookiecutter_python.hooks.pre_gen_project), 22
InputSanitizationError, 22
InputValueError, 15
InteractiveDialog (class in cookiecutter_python.handle.dialogs), 20
InteractiveDialog (class in cookiecutter_python.handle.dialogs.dialog), 20
InteractiveDialog (class in cookiecutter_python.handle.dialogs.lib), 19
InteractiveDialogsPipeline (class in cookiecutter_python.handle.interactive_cli_pipeline), 20
InvalidInterpretersError, 16
InvalidYamlFormatError, 17
is_future_response_200()
(cookiecutter_python.backend.hosting_services.handler.CheckHostingServiceResultHandler static method), 12
is_git_repo_clean() (in module cookiecutter_python.hooks.post_gen_project), 21
iter_files() (in module cookiecutter_python.hooks.post_gen_project), 21
cookiecutter_python.backend.hosting_services.exception, 1
cookiecutter_python.backend.hosting_services.extract_n, 1
cookiecutter_python.backend.hosting_services.handle_ho, 1
cookiecutter_python.backend.hosting_services.handler, 1
cookiecutter_python.backend.hosting_services.value_ext, 1
cookiecutter_python.backend.hosting_services.web_hosti, 1
cookiecutter_python.backend.load_config, 17
cookiecutter_python.backend.main, 18
cookiecutter_python.backend.post_main, 18
cookiecutter_python.backend.pre_main, 18
cookiecutter_python.backend.proxy, 18
cookiecutter_python.backend.request, 18
cookiecutter_python.backend.sanitization, 17
cookiecutter_python.backend.sanitization.input_sanitiz, 1
cookiecutter_python.backend.sanitization.interpreters, 1

```

## K

```
key_name(cookiecutter_python.backend.hosting_services.value_extractor.BaseValueExtractor attribute): 12
, cookiecutter_python.backend.sanitization.string_sanitizer
```

**L**

load() (in module cookiecutter_python.utils), 22	cookiecutter_python.backend.sanitization.string_sanitizer, 22
load_yaml() (in module cookiecutter_python.backend.load_config), 19	cookiecutter_python.backend.user_config_proxy, 19
log_info_args() (cookiecutter_python.backend.proxy.BaseProxyMethod), 22	cookiecutter_python.cli, 22
log_message() (cookiecutter_python.backend.sanitization.string_sanitizer.CliHandler), 22	cookiecutter_python.cli_handlers, 22
method), 14	cookiecutter_python.exceptions, 22
log_message() (cookiecutter_python.backend.sanitization.string_sanitizer.CliHandler), 14	cookiecutter_python.exceptions.CliSanitizer method), 22
	cookiecutter_python.handle.dialogs, 20

cookiecutter\_python.handle.dialogs.lib, 19  
 cookiecutter\_python.handle.dialogs.lib.project\_name, 19  
 cookiecutter\_python.handle.interactive\_cli\_pipeline, 20  
 cookiecutter\_python.handle.node\_base, 21  
 cookiecutter\_python.handle.node\_factory, 21  
 cookiecutter\_python.handle.node\_interface, 21  
 cookiecutter\_python.hooks, 22  
 cookiecutter\_python.hooks.post\_gen\_project, 21  
 cookiecutter\_python.hooks.pre\_gen\_project, 23  
 cookiecutter\_python.utils, 22

## N

`NameSanitizer` (class in `cookiecutter_python.backend.sanitization.string_sanitizers.service_reg_module_name`), 15  
`name` (`cookiecutter_python.backend.check_server_result.CheckWebServiceResult` property), 17  
`name_extractor` (`cookiecutter_python.backend.hosting_services.web_hosting_service_checker.NameExtractor` attribute), 11  
`NameExtractor` (class in `cookiecutter_python.backend.hosting_services.web_hosting_service_checker`), 11  
`no_input` (`cookiecutter_python.request.Request` attribute), 18  
`Node` (class in `cookiecutter_python.handle.node_interface`), 21  
`NodeFactory` (class in `cookiecutter_python.handle.node_factory`), 21  
`NonCriticalHandlerBuilder` (class in `cookiecutter_python.backend.error_handling.handler_builder`), 18

## O

`offline` (`cookiecutter_python.backend.request.Request` attribute), 18

## P

`package_name` (`cookiecutter_python.backend.hosting_services.handle_hosting_service_check.CheckHostingServiceHandler` attribute), 11  
`parse_context()` (in module `cookiecutter_python.backend.helpers`), 17  
`post_file_removal()` (in module `cookiecutter_python.hooks.post_gen_project`), 21  
`post_hook()` (in module `cookiecutter_python.hooks.post_gen_project`), 22  
`post_main()` (in module `cookiecutter_python.backend.post_main`), 18  
`PostFileRemovalError`, 21  
`pre_main()` (in module `cookiecutter_python.backend.pre_main`), 18  
`process()` (`cookiecutter_python.handle.interactive_cli_pipeline.InteractiveDialogsPipeline` method), 20  
`process()` (`cookiecutter_python.handle.node_base.DialogNode` method), 21  
`process()` (`cookiecutter_python.handle.node_interface.Node` method), 21  
`ProjectNameDialog` (class in `cookiecutter_python.handle.dialogs.lib.project_name`), 19  
`PyPIServerFactory` (class in `cookiecutter_python.backend.hosting_services.web_hosting_service`), 12  
`PYTEST_PLUGIN_ONLY()` (in module `cookiecutter_python.hooks.post_gen_project`), 21

## R

`ReadTheDocsServerFactory` (class in `cookiecutter_python.backend.hosting_services.web_hosting_service`), 12  
`regex` (`cookiecutter_python.backend.sanitization.string_sanitizers.base_string_sanitizers.base_string_sanitizers` attribute), 15  
`regex` (`cookiecutter_python.backend.sanitization.string_sanitizers.base_string_sanitizers.base_string_sanitizers` attribute), 13  
`register_exception()` (`cookiecutter_python.backend.sanitization.input_sanitization.Sanitize` class method), 16  
`register_sanitizer()` (`cookiecutter_python.backend.sanitization.input_sanitization.Sanitize` class method), 16

`version_msg()` (in module `cookiecutter_python.cli`), [22](#)

`VersionSanitizer` (class in `cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version`), [15](#)

## W

`web_servers` (`cookiecutter_python.backend.request.Request` attribute), [18](#)

`web_service_checker` (`cookiecutter_python.backend.hosting_services.check_service.ServiceChecker` attribute), [10](#)

`WebHostingService` (class in `cookiecutter_python.backend.hosting_services.web_hosting_service`), [13](#)

`WebHostingServiceChecker` (class in `cookiecutter_python.backend.hosting_services.check_web_hosting_service`), [10](#)