
cookiecutter-python-package

Release 2.3.0

Konstantinos Lampridis

Mar 13, 2024

CONTENTS:

1	Python Package Generator	1
1.1	What's included?	1
1.2	What to expect?	2
1.3	Quickstart	3
1.4	License	4
1.5	Indices and tables	24
	Python Module Index	25
	Index	27

PYTHON PACKAGE GENERATOR

Generate Python Project and enjoy **streamlined DevOps** using a powerful **CI/CD Pipeline**.


Documentation available at <https://python-package-generator.readthedocs.io/>.

1.1 What's included?

- Generator of Python Project (see [Quickstart](#)), with **CLI** for **Linux, MacOS, and Windows**
- Option to Generate Python Package designed as *module*, *module+cli*, or *pytest-plugin*!
- Scaffold over **24 files**, from [Template](#), to have a *ready-to-develop* **Project equipped** with:
 - Fully-featured **CI/CD Pipeline**, running on [Github Actions](#), defined in *.github/*
 - **Continuous Delivery** to *PyPI* (i.e. [pypi.org](#), [test.pypi.org](#)) and *Dockerhub*
 - **Continuous Integration**, with **Test Suite** running *pytest*, located in the *tests* dir
 - **Continuous Documentation**, building with *mkdocs* or *sphinx*, and hosting on *readthedocs*, located in the *docs* dir
 - **Static Type Checking**, using [mypy](#)
 - **Lint Check** and **Apply** commands, using the fast [Ruff](#) linter, along with standard [isort](#), and [black](#)
 - **Build Command**, using the [build](#) python package

1.2 What to expect?

You can be up and running with a new Python Package, and run workflows on Github Actions, such as:

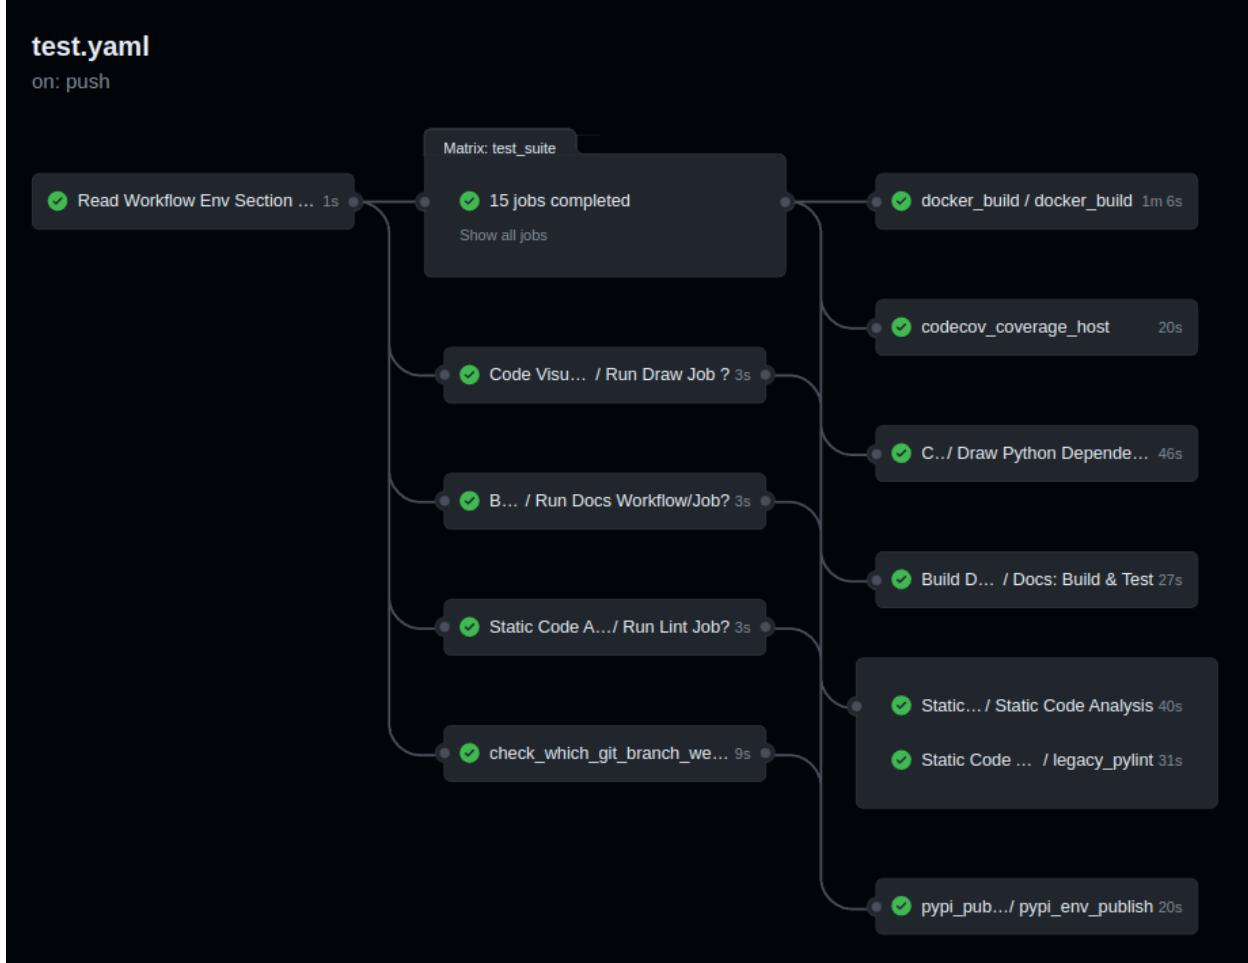

Link: <https://github.com/boromir674/biskotaki/actions/runs/4157571651>

1. **CI Pipeline**, running on **Github Actions**, defined in `.github/`
 - a. **Job Matrix**, spanning different *platform's* and *python version's*
 1. Platforms: *ubuntu-latest*, *macos-latest*
 2. Python Interpreters: *3.7*, *3.8*, *3.9*, *3.10*, *3.11*, *3.12*
 - b. **Parallel Job** execution, generated from the *matrix*, that runs the *Test Suite*
 - c. **Artifact** store of **Source** and **Wheel** Distributions, factoring Platform and Python Version

1.2.1 Auto Generated Sample Package Biskotaki

Check the **Biskotaki Python Package Project**, for a taste of the project structure and capabilities this Template can generate!

It it entirely generated using this **Python Package Template**:

Source Code hosted on *Github* at <https://github.com/boromir674/biskotaki>

Python Package hosted on *pypi.org* at <https://pypi.org/project/biskotaki/>

CI Pipeline hosted on *Github Actions* at <https://github.com/boromir674/biskotaki/actions>

1.3 Quickstart

To **install** the latest Generator in your environment, run:

```
pip install cookiecutter-python
```

The `generate-python` (executable) CLI should now be available in your environment.

Next, **create** a file, let's call it `gen-config.yml`, with the following content:

```
default_context:  
    project_name: Demo Generated Project  
    project_type: module+cli  
    full_name: John Doe  
    email: john.doe@something.org  
    github_username: john-doe  
    project_short_description: 'Demo Generated Project Description'  
    initialize_git_repo: 'no'  
    interpreters: {"supported-interpreters": ["3.8", "3.9", "3.10", "3.11"]}
```

To **generate** a Python Package Project, run:

```
mkdir gen-demo-dir  
cd gen-demo-dir  
  
generate-python --config-file ./gen-config.yml --no-input
```

Now, you should have generated a new Project for a Python Package, based on the [Template](#)!

The Project should be located in the newly created `demo-generated-project` directory.

To leverage all out-of-the-box development operations (ie scripts), install `tox`:

```
python3 -m pip install --user 'tox==3.27.1'
```

To verify `tox` available in your environment, run: `tox --version`

Please, do a `cd` into the newly created directory, ie `cd <my-great-python-package>`.

To run the Test Suite, `cd` into the newly created Project folder, and run:

```
tox -e dev
```

All Tests should pass, and you should see a *coverage* report!

To run Type Checking against the Source Code, run:

```
tox -e type
```

All Type Checks should pass!

To setup a Git Repository, run:

```
git init
git add .
git checkout -b main
git commit -m "Initial commit"
```

To setup a Remote Repository, run for example:

```
git remote add origin <remote-repository-url>
git push -u origin main
```

To trigger the CI/CD Pipeline, run:

```
git push
```

Navigate to your github.com/username/your-repo/actions page, to see the CI Pipeline running!

Develop your package's **Source Code** (*business logic*) inside `src/my_great_python_package` dir :)

Develop your package's **Test Suite** (ie *unit-tests, integration tests*) inside `tests` dir :-)

Read the Documentation's [Use Cases](#) section for more on how to leverage your generated Python Package features.

1.3.1 Next Steps

To prepare for an Open Source Project Development Lifecycle, you should visit the following websites:

- PyPI, test.pypi.org, Dockerhub, and Read the Docs, for setting up Release and Documentation Pipelines
- github.com/your-account to configure Actions, through the web UI
- Codecov, Codacy, and Codeclimate, for setting up Automated Code Quality, with CI Pipelines
- <https://www.bestpractices.dev/> for registering your Project for OpenSSF Best Practices Badge

Happy Developing!

1.4 License

- [GNU Affero General Public License v3.0](#)

1.4.1 Free/Libre and Open Source Software (FLOSS)

Introduction

This is **Cookiecutter Python Package**, a *Template Project* used to generate fresh new open source *Python Package*'s. The Template is implemented as a *cookiecutter* and it is available both as source code and as a Python Package in itself.

Goal of this project is to automate the process of creating a new Python Package, by providing the user with a “bootstrap” method,

to quickly set up all the *support* files required to seemlessly build and publish the package on pypi.org (the official Python Pckage Index public server).

Additionally, it instruments a basic **Test Suite**, multiple **Commands**, as well as a **CI** pipeline, with parallel execution of the *build matrix*, running on *Github Actions*.

This documentation aims to help people understand what are the features of the library and how they can use it. It presents some use cases and an overview of the library capabilities and overall design.

Why this Generator?

So, why choose this Python Package Generator?

Robust CLI

You want an *easy-to-use, cross-platform* CLI.

- It offers an **1-click** command, or option for an interactive *wizard*
- **Tested on 15 different setups**, across multiple *Platforms* and *Python Interpreters*
 - **OS:** {Ubuntu, MacOS, Windows} X **Python:** {3.7, 3.8, 3.9, 3.10, 3.11}
- Built on established software, such as *cookiecutter* and *jinja2*

“DevOps”: aka Automations and CI/CD

You want to focus on your *business logic* and *test cases*, in new Python projects.

- Scaffolded project is **one push** away from triggering its **CI/CD pipeline** on Github Actions.
- **Continuous Deployment**, publishing at *pypi.org*, *Docker Hub*, and *Read The Docs*
- Designed for **GitOps**, supporting various *automated developer activities*
- **Automations** with same entrypoint for both **CI and Local** run, via *tox*
- Stress-Testing, with **Job Matrix** spanning multiple *Python Interpreters, Operating Systems*

Approved Tooling

You want the best tools under your belt, for your development lifecycle.

- *tox, poetry, ruff, mypy, pytest, black, isort, mkdocs, sphinx*

Template Variant

You want *poetry*, but what if you want to develop a *pytest plugin*?

- Generate *module*: a Python Distribution, with python API/sdk
 - configured with *poetry* backend
- Generate *module+cli*: a Python Distribution, with a CLI and a python API/sdk
 - configured with *poetry* backend
- Generate *pytest-plugin*: a Python Distribution, designed for a *pytest plugin*
 - configured with *setuptools* backend, as Required by *pytest!*

Generate Python Project

Our Python Generator Project was designed to be installable via *pip* and then invoked through the generate-python entrypoint to the CLI.

Getting the CLI

Cookiecutter Python Package, available as *source code* on github, with published **Distribution** on [pypi.org PyPI](https://pypi.org), and **Docker Image** on [hub.docker.com Registry](https://hub.docker.com).

Install in virtual env, and make available globally in your (host) machine.

```
pipx install cookiecutter-python
```

Now, the generate-python executable should be available.

Pull the latest Stable image from Docker Hub

```
docker pull boromir674/generate-python:master
```

Now, the CLI should be available, via

```
docker run -it --rm boromir674/generate-python:master
```

Hint: Not to be confused with the ‘latest’ (channel) image tag advertised by dockerhub, which my no means promises to contain a stable release.

Hint: We promise stable releases on ‘**master**’ tag, since on git, ‘all tagged production releases are on ‘**master**’ branch. They are the same to correspond to PyPI Distributions as well.

Install in virtual env

```
virtualenv env --python=python3
source env/bin/activate

pip install cookiecutter-python
```

Make available to current user

```
ln -s env/bin/generate-python ~/.local/bin/generate-python
```

Now, the generate-python executable should be available (assuming `~/.local/bin` is in your PATH).

Check installation

You can verify by running the following:

```
generate-python --version
```

Hint: All methods demonstrated for **getting the CLI**, *download* the **Latest Stable** (Release).

Using the CLI

Using the cli is as simple as invoking *generate-python* from a console.

You can run the following to see all the available parameters you can control:

```
generate-python --help
```

```
docker run -it --rm boromir674/generate-python:master --help
```

The most common way to generate a new Python Package Project is to run:

```
generate-python
```

```
docker run -it --rm boromir674/generate-python:master
```

This will prompt you to input some values and create a fresh new Project in the current directory!

Now, simply *cd* into the generated Project's directory and enjoy some of the features the generator supplies new projects with!

More on use cases in the next section.

Generated Python Project Use Cases

Ready to enjoy some of your newly generated Python Package Project **features** available out-of-the-box!?

For instance:

1. Leverage the supplied *tox environments* to automate various **Testing** and **DevOps** related activities.

Assuming you have *tox* installed (example installation command: *python3 -m pip install -user tox*) and you have done a *cd* into the newly generated Project directory, you can do for example:

- a. Run the **Test Suite** against different combinations of *Python versions* (ie 3.7, 3.8) and different ways of installing (ie ‘dev’, ‘sdist’, ‘wheel’) the <my_great_python_package> package:

```
tox -e "py{3.7, 3.8}-{dev, sdist, wheel}"
```

- b. Check the code for **compliance** with **best practises** of the *Python packaging ecosystem* (ie PyPI, pip), build *sdist* and *wheel* distributions and store them in the *dist* directory:

```
tox -e check && tox -e build
```

- c. **Deploy** the package's distributions in a *pypi* (index) server:

1. Deploy to **staging**, using the *test* pypi (index) server at test.pypi.org:

```
TWINE_USERNAME=username TWINE_PASSWORD=password PACKAGE_DIST_VERSION=1.0.0
└─tox -e deploy
```

2. Deploy to **production**, using the *production* pypi (index) server at pypi.org:

```
TWINE_USERNAME=username TWINE_PASSWORD=password PACKAGE_DIST_VERSION=1.0.0
└─PYPI_SERVER=pypi tox -e deploy
```

Note: Setting PYPI_SERVER=pypi indicates to deploy to *pypi.org* (instead of *test.pypi.org*).

Note: Please modify the TWINE_USERNAME, TWINE_PASSWORD and PACKAGE_DIST_VERSION environment variables, accordingly.

TWINE_USERNAME & TWINE_PASSWORD are used to authenticate (user credentials) with the targeted pypi server.

PACKAGE_DIST_VERSION is used to avoid accidentally uploading distributions of different versions than intended.

2. Leverage the **CI Pipeline** and its **build matrix** to run the **Test Suite** against a combination of different Platforms, different Python interpreter versions and different ways of installing the subject Python Package:
Trigger the Test Workflow on the CI server, by pushing a git commit to a remote branch (ie master on github).
Navigate to the CI Pipeline web interface (hosted on Github Actions) and inspect the build results!
-

Note: You might have already *pushed*, in case you answered *yes*, in the *initialize_git_repo* prompt, while generating the Python Package, and in that case, the **Test Workflow** should have already started running! Out-of-the-box, *triggering* the **Test Workflow** happens only when pushing to the *master* or *dev* branch.

References

Here, you will find the cookiecutter_python's **Python API Reference Documentation**.

[cookiecutter_python package](#)

[Subpackages](#)

[cookiecutter_python.backend package](#)

[Subpackages](#)

[cookiecutter_python.backend.error_handling package](#)

[Submodules](#)

[cookiecutter_python.backend.error_handling.handler_builder module](#)

```
class cookiecutter_python.backend.error_handling.handler_builder.CriticalHandlerBuilder
    Bases: object
class cookiecutter_python.backend.error_handling.handler_builder.HandlerBuilder
    Bases: object
    subclasses: Dict[str, type] = {'critical': <class
        'cookiecutter_python.backend.error_handling.handler_builder.CriticalHandlerBuilder'>,
        'non-critical': <class 'cookiecutter_python.backend.error_handling.handler_builder.
        NonCriticalHandlerBuilder'>}
class
cookiecutter_python.backend.error_handling.handler_builder.NonCriticalHandlerBuilder
    Bases: object
```

Module contents

```
class cookiecutter_python.backend.error_handling.HandlerBuilder
    Bases: object
    subclasses: Dict[str, type] = {'critical': <class
        'cookiecutter_python.backend.error_handling.handler_builder.CriticalHandlerBuilder'>,
        'non-critical': <class 'cookiecutter_python.backend.error_handling.handler_builder.
        NonCriticalHandlerBuilder'>}
```

cookiecutter_python.backend.generator package

Submodules

cookiecutter_python.backend.generator.generator module

Module contents

cookiecutter_python.backend.hosting_services package

Submodules

cookiecutter_python.backend.hosting_services.check_engine module

```
class cookiecutter_python.backend.hosting_services.check_engine.Engine(config_file: None | str,
    default_config: None | bool, services_info:
    Tuple, checker: Checker
    = NOTHING, handlers:
    Handlers = NOTHING)
```

Bases: object

check(servers: List[str])

Request Future per supported server, for web hosting service checks

For each server the dedicated ‘checker’ is called, which tries to return a Future.

Returns None checker’s ‘activation’ boolean flag was off at runtime. Returns None if internal mechanism for determining server URL fails to derive the URL (atm URL is only tried to be read from User Config yaml)

Parameters

servers (List[str]) – [description]

Returns

[description]

Return type

[type]

checker: Checker

config_file: None | str

static create(config_file: str, default_config: bool)

Initialize objects, for Asynchronous http with 3rd-party Services

Objects are designed to Ask PyPI and Read The Docs, if the soon to be generated package name, and readthedocs project slug are available.

These ‘Checker’ objects make asynchronous http requests to PyPI and RTD web servers, for non-blocking IO, and to avoid blocking the main thread.

Checkers are initialized as ‘Activated’ if User Config is given and Default Config is False.

Then each Checker (pypi, rtd) requires: - PyPI requires the ‘pkg_name’ in User’s yaml Config - RTD requires the ‘readthedocs_project_slug’ in User’s yaml Config to derive the URLs for Future Requests

Parameters

- `config_file (str)` – user's yaml config file
- `default_config (bool)` – default config flag

`default_config: None | bool`

`handle(request_result)`

`handlers: Handlers`

`services_info: Tuple`

cookiecutter_python.backend.hosting_services.check_service module

```
class cookiecutter_python.backend.hosting_services.check_service.ServiceChecker(name_extractor:  
                                Callable[[str],  
                                str],  
                                web_service_checker:  
                                WebHost-  
                                ingSer-  
                                viceChecker,  
                                acti-  
                                vate_flag:  
                                bool, con-  
                                fig_file_path:  
                                str)
```

Bases: object

`activate_flag: bool`

`config_file_path: str`

`static create(hosting_service_info, activate_flag: bool, config_file_path)`

`name_extractor: Callable[[str], str]`

`property service_name`

`web_service_checker: WebHostingServiceChecker`

cookiecutter_python.backend.hosting_services.check_web_hosting_service module

```
class cookiecutter_python.backend.hosting_services.check_web_hosting_service.WebHostingServiceChecker(un  
                                              C  
                                              st
```

Bases: object

Check if CI config is out-of-the-box ok to integrate with hosting services

`static create(hosting_service)`

`url_getter: Callable[[str], str]`

cookiecutter_python.backend.hosting_services.checker module

```
class cookiecutter_python.backend.hosting_services.checker.Checker(config_file: None | str,  
                                                               default_config: None | bool,  
                                                               checkers: Checkers)
```

Bases: object

`checkers: Checkers`

`config_file: None | str`

`default_config: None | bool`

```
static from_hosting_info(config_file, default_config, hosting_infos)
```

Activate Web Host Checks if user config and NOT default config

cookiecutter_python.backend.hosting_services.checkers module

```
class cookiecutter_python.backend.hosting_services.checkers.Checkers(checkers: MutableMapping)
```

Bases: object

```
static from_hosting_info(hosting_infos, activate_flag, config_file)
```

cookiecutter_python.backend.hosting_services.exceptions module

exception

```
cookiecutter_python.backend.hosting_services.exceptions.ContextVariableDoesNotExist
```

Bases: Exception

Raised when a Context Variable does not exist, in a dict-like object.

cookiecutter_python.backend.hosting_services.extract_name module

```
class cookiecutter_python.backend.hosting_services.extract_name.NameExtractor(name_extractor: Callable[[Mapping], str])
```

Bases: object

Extract Context Value, from a User's Config (YAML) file.

```
static create(hosting_service_info)
```

```
name_extractor: Callable[[Mapping], str]
```

cookiecutter_python.backend.hosting_services.handle_hosting_service_check module

```
class cookiecutter_python.backend.hosting_services.handle_hosting_service_check.CheckHostingServiceHandle
```

Bases: object

```
check_hosting_service: Callable[[str], bool]
```

```
package_name: str
```

```
service_name: str
```

`cookiecutter_python.backend.hosting_services.handler module`

```
class cookiecutter_python.backend.hosting_services.handler.CheckHostingServiceResultHandler(service_name: str)

    Bases: object
    static is_future_response_200(result) → bool
    service_name: str

class cookiecutter_python.backend.hosting_services.handler.Handlers(handlers: Mapping)

    Bases: object
    static from_checkers(checkers)
    handlers: Mapping
```

`cookiecutter_python.backend.hosting_services.value_extractor module`

```
class cookiecutter_python.backend.hosting_services.value_extractor.BaseValueExtractor(key_name: str)

    Bases: ValueExtractor
    key_name: str

class cookiecutter_python.backend.hosting_services.value_extractor.ValueExtractor

    Bases: object
```

`cookiecutter_python.backend.hosting_services.web_hosting_service module`

```
class cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServiceInfo

    Bases: object
    create(*args, **kwargs)

        Factory method for creating WebHostingService instances.

        Raises
            NotImplementedError – [description]
    property service
    property variable_name: str

class cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServices

    Bases: object
    subclasses: Dict[str, type] = {'pypi': <class 'cookiecutter_python.backend.hosting_services.web_hosting_service.PyPIServerFactory'>, 'readthedocs': <class 'cookiecutter_python.backend.hosting_services.web_hosting_service.ReadTheDocsServerFactory'>}

class cookiecutter_python.backend.hosting_services.web_hosting_service.HostingServicesInfo(*args)

    Bases: SubclassRegistry[HostingServiceInfo]
class cookiecutter_python.backend.hosting_services.web_hosting_service.PyPIServerFactory

    Bases: HostingServiceInfo
    create(*args, **kwargs)

        Factory method for creating WebHostingService instances.

        Raises
            NotImplementedError – [description]
    property variable_name: str

class cookiecutter_python.backend.hosting_services.web_hosting_service.ReadTheDocsServerFactory

    Bases: HostingServiceInfo
```

```

create(*args, **kwargs)
    Factory method for creating WebHostingService instances.
    Raises
        NotImplementedError – [description]
    property variable_name: str
class cookiecutter_python.backend.hosting_services.web_hosting_service.URLGetter(url_pattern: str, service_name: str)
Bases: object
service_name: str
url_pattern: str
class cookiecutter_python.backend.hosting_services.web_hosting_service.WebHostingService(url: URLGetter)
Bases: object
static create(url_pattern: str, service_name: str)
url: URLGetter

```

Module contents

```

class cookiecutter_python.backend.hosting_services.Engine(config_file: None | str, default_config: None | bool, services_info: Tuple[Checker], checker: Checker = NOTHING, handlers: Handlers = NOTHING)

```

Bases: object

check(servers: List[str])

Request Future per supported server, for web hosting service checks

For each server the dedicated ‘checker’ is called, which tries to return a Future.

Returns None checker’s ‘activation’ boolean flag was off at runtime. Returns None if internal mechanism for determining server URL fails to derive the URL (atm URL is only tried to be read from User Config yaml)

Parameters

servers (List[str]) – [description]

Returns

[description]

Return type

[type]

checker: Checker

config_file: None | str

static create(config_file: str, default_config: bool)

Initialize objects, for Asynchronous http with 3rd-party Services

Objects are designed to Ask PyPI and Read The Docs, if the soon to be generated package name, and readthedocs project slug are available.

These ‘Checker’ objects make asynchronous http requests to PyPI and RTD web servers, for non-blocking IO, and to avoid blocking the main thread.

Checkers are initialized as ‘Activated’ if User Config is given and Default Config is False.

Then each Checker (pypi, rtd) requires: - PyPI requires the ‘pkg_name’ in User’s yaml Config - RTD requires the ‘readthedocs_project_slug’ in User’s yaml Config to derive the URLs for Future Requests

Parameters

- `config_file (str)` – user's yaml config file
- `default_config (bool)` – default config flag

`default_config: None | bool`

`handle(request_result)`

`handlers: Handlers`

`services_info: Tuple`

`cookiecutter_python.backend.sanitization package`

Subpackages

`cookiecutter_python.backend.sanitization.string_sanitizers package`

Submodules

`cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer module`

`class cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer.`

`AbstractSanitizer`

Bases: `SanitizerInterface`, ABC

`exception_msg: str`

`abstract log_message(error, data) → Tuple`

`verify: Callable[[Any], None]`

`class cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer.BaseSanitizer(verify:`
`Callable[[A`
`None],`
`ex-`
`cep-`
`tion_msg:`
`str,`
`log_func:`
`Callable[[st`
`Any],`
`Tu-`
`ple])`

Bases: `AbstractSanitizer`

`exception_msg: str`

`log_message(error: str, data) → Tuple`

`verify: Callable[[Any], None]`

`class cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer.`

`SanitizerInterface`

Bases: ABC

Sanitizer for the Generator Input Parameters.

cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input module

```
class cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.BaseSanitizer(verify:
    Callab
    None],
    ex-
    cep-
    tion_m
    str,
    log_fur
    Callab
    Any],
    Tu-
    ple])
```

Bases: *AbstractSanitizer*

exception_msg: str

log_message(error: str, data) → Tuple

verify: Callable[[Any], None]

exception cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.
InputValueError

Bases: Exception

cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name module

```
class cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name.ModuleNameSanitizer
```

Bases: RegExSanitizer

exception_msg = 'Expected a valid Python Module name value'

classmethod log_message(error, module) → Tuple[str | Mapping, ...]

regex: t.ClassVar[Pattern] = re.compile('^[_a-zA-Z][_a-zA-Z0-9]*\$')

cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name.sanitize_module_name

cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version module

```
class cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version.VersionSanitizer
```

Bases: RegExSanitizer

exception_msg = 'Expected a Semantic Version value'

classmethod log_message(error, string) → Tuple[str | Mapping, ...]

regex: t.ClassVar[Pattern] =
re.compile('^(?P<major>0|[1-9]\d*)\.(?P<minor>0|[1-9]\d*)\.(?P<patch>0|[1-9]\d*)(?:-(?P<prerelease>(?:(0|[1-9]\d*|\d*[a-zA-Z-][0-9a-zA-Z-]*)(?:\.(?:(0|[1-9]\d*|\d*[a-zA-Z-][0-9a-zA-Z-]*))?)?(?:\+(?P<bu

cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version.sanitize_version(version:
str)
→
None

Module contents

Submodules

cookiecutter_python.backend.sanitization.input_sanitization module

```
class cookiecutter_python.backend.sanitization.input_sanitization.Sanitize
```

Bases: object

```
property exceptions: Mapping[str, Type[Exception] | Tuple]
```

```
exceptions_map: Dict[str, List[Type[Exception]]] = {'interpreters': [<class  
'cookiecutter_python.backend.sanitization.interpreters_support.  
InvalidInterpretersError'>], 'module-name': [<class  
'cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.  
InputValueError'>], 'semantic-version': [<class  
'cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input.  
InputValueError'>]}
```

```
classmethod register_exception(sanitizer_identifier: str)
```

Add an Exception to the sanitizers' expected exceptions registry.

Parameters

```
    sanitizer_identifier (str) – [description]
```

```
classmethod register_sanitizer(sanitizer_identifier: str)
```

Add a callback to the sanitizers' registry.

Parameters

```
    sanitizer_identifier (str) – [description]
```

```
sanitizers_map: Dict[str, Callable[[Any], None]] = {'interpreters': <function  
verify_input_interpreters>, 'module-name': <function sanitize_module_name>,  
'semantic-version': <function sanitize_version>}
```

cookiecutter_python.backend.sanitization.interpreters_support module

```
exception
```

```
cookiecutter_python.backend.sanitization.interpreters_support.InvalidInterpretersError
```

Bases: Exception

```
cookiecutter_python.backend.sanitization.interpreters_support.unsupported_interpreters(interpreters:  
Se-
```

```
quence[str])
```

```
→
```

```
Iterator[str]
```

```
cookiecutter_python.backend.sanitization.interpreters_support.verify_input_interpreters(interpreters:  
Se-
```

```
quence[str])
```

```
→
```

```
None
```

Module contents

Submodules

cookiecutter_python.backend.check_server_result module

```
class cookiecutter_python.backend.check_server_result.CheckWebServerResult
```

Bases: ABC

Interface for checking the result of a web server request.

abstract property future

abstract property name: str

The name of the resource requested to search on the web server.

Returns

the name of the resource (ie python package slug, rtd project)

Return type

str

abstract property service_name: str

The name of the web server.

Returns

the name (slug) of the web server

Return type

str

cookiecutter_python.backend.gen_docs_common module

Internal configuration for Documentation Generation.

```
cookiecutter_python.backend.gen_docs_common.get_docs_gen_internal_config() → Dict[str, str]
```

Derive the internal configuration for Documentation Generation.

Information included:

- the folder where we each docs builder will generate the docs. We locate the template folder for each docs builder, which is the Single Source of Truth for the docs builder's output folder.

cookiecutter_python.backend.helpers module

```
cookiecutter_python.backend.helpers.parse_context(config_file: str)
```

cookiecutter_python.backend.load_config module

```
exception cookiecutter_python.backend.load_config.InvalidYamlFormatError
```

Bases: Exception

```
exception cookiecutter_python.backend.load_config.UserYamlDesignError
```

Bases: Exception

```
cookiecutter_python.backend.load_config.get_interpreters_from_yaml(config_file: str) →
    Mapping[str, Sequence[str]] | None
```

Parse the ‘interpreters’ variable out of the user’s config yaml file.

Parameters

config_file (str) – path to the user’s config yaml file

Raises

- **InvalidYamlFormatError** – if yaml parser fails to load the user’s config
- **UserYamlDesignError** – if yaml does not contain the ‘default_context’ key

Returns

dictionary with interpreters as a sequence of strings,
mapped to the ‘supported-interpreters’ key

Return type

GivenInterpreters

cookiecutter_python.backend.load_config.**load_yaml**(*config_file*) → MutableMapping

cookiecutter_python.backend.main module

cookiecutter_python.backend.main.**generate**(*no_input=False*, *offline=False*, *extra_context=None*,
replay=False, *overwrite=False*, *output_dir='.'*,
config_file=None, *skip_if_file_exists=False*,
default_config=False, *password=None*, *directory=None*,
checkout=None) → str

Create Python Project, with CI/CD pipeline, from the project template.

Generate/Scaffold a new Python Project, including configuration enabling automations such as CI and
Continuous Delivery of Docker and Python ‘artifacts’, and Continuous Documentation of the Python Project.

cookiecutter_python.backend.post_main module

exception cookiecutter_python.backend.post_main.CheckWebServerError

Bases: Exception

Raised on Connection Error, when Requesting a Web Server’s Future.

cookiecutter_python.backend.post_main.**post_main**(*request*)

Check if any CI ‘deployment’ (ie in pypi), would require minor tweak.

cookiecutter_python.backend.pre_main module

cookiecutter_python.backend.pre_main.**pre_main**(*request*)

Do preparatory steps Generation process, by settings things as the Template Context.

Parameters

****kwargs** – Arbitrary keyword arguments.

cookiecutter_python.backend.proxy module

class cookiecutter_python.backend.proxy.**BaseProxy**(*proxy_subject: ProxySubject*)

Bases: Proxy[T], Generic[T]

static **log_info_args**(*message: str*, **args*, ***kwargs*) → Tuple[str, str]

cookiecutter_python.backend.request module

class cookiecutter_python.backend.request.**Request**(**config_file: str*, *default_config: bool*,
web_servers: List[str], *no_input: bool*,
extra_context: dict, *check: Any | None = None*,
check_results: None | Iterable[CheckWebServerResult] = None, *offline: bool = False*)

Bases: object

check: Any

check_results: None | Iterable[CheckWebServerResult]

config_file: str

default_config: bool

```
extra_context: dict
no_input: bool
offline: bool
web_servers: List[str]
```

cookiecutter_python.backend.user_config_proxy module

Module contents

exception cookiecutter_python.backend.CheckWebServerError

Bases: `Exception`

Raised on Connection Error, when Requesting a Web Server's Future.

`cookiecutter_python.backend.generate(no_input=False, offline=False, extra_context=None, replay=False,
 overwrite=False, output_dir='.', config_file=None,
 skip_if_file_exists=False, default_config=False, password=None,
 directory=None, checkout=None) → str`

Create Python Project, with CI/CD pipeline, from the project template.

Generate/Scaffold a new Python Project, including configuration enabling automations such as CI and

Continuous Delivery of Docker and Python ‘artifacts’, and Continuous Documentation of the Python Project.

`cookiecutter_python.backend.get_docs_gen_internal_config() → Dict[str, str]`

Derive the internal configuration for Documentation Generation.

Information included:

- the folder where we each docs builder will generate the docs. We locate the template folder for each docs builder, which is the Single Source of Truth for the docs builder’s output folder.

cookiecutter_python.handle package

Subpackages

cookiecutter_python.handle.dialogs package

Subpackages

cookiecutter_python.handle.dialogs.lib package

Submodules

cookiecutter_python.handle.dialogs.lib.project_name module

class cookiecutter_python.handle.dialogs.lib.project_name.ProjectNameDialog

Bases: `object`

`dialog(cookie_vars) → Mapping[str, str]`

Module contents

```
class cookiecutter_python.handle.dialogs.lib.InteractiveDialog
    Bases: object
    subclasses = {'project-name': <class
        'cookiecutter_python.handle.dialogs.lib.project_name.ProjectNameDialog'>}
```

Submodules

cookiecutter_python.handle.dialogs.dialog module

```
class cookiecutter_python.handle.dialogs.dialog.Dialog
    Bases: object
    abstract dialog(*args, **kwargs)
class cookiecutter_python.handle.dialogs.dialog.DialogRegistry(*args)
    Bases: SubclassRegistry[Dialog]
class cookiecutter_python.handle.dialogs.dialog.InteractiveDialog
    Bases: object
    subclasses = {'project-name': <class
        'cookiecutter_python.handle.dialogs.lib.project_name.ProjectNameDialog'>}
```

Module contents

```
class cookiecutter_python.handle.dialogs.InteractiveDialog
    Bases: object
    subclasses = {'project-name': <class
        'cookiecutter_python.handle.dialogs.lib.project_name.ProjectNameDialog'>}
```

Submodules

cookiecutter_python.handle.interactive_cli_pipeline module

Handles sequence of Interactive User Dialogs, for Context Information.

```
class cookiecutter_python.handle.interactive_cli_pipeline.InteractiveDialogsPipeline
```

Bases: object

Handles sequence of Interactive User Dialogs, for Context Information.

```
dialogs = ['project-name']
```

```
process(request)
```

Process sequence of Interactive User Dialogs, for Context Information.

cookiecutter_python.handle.node_base module

```
class cookiecutter_python.handle.node_base.DialogNode(dialog)
```

Bases: [Node](#)[List, Mapping[str, Any]]

Handles a single Interactive User Dialog, for Context Information.

```
process(request)
```

Process a single Interactive User Dialog, for Context Information.

cookiecutter_python.handle.node_factory module

```
class cookiecutter_python.handle.node_factory.NodeFactory
    Bases: object
    static create(dialog_name: str)
```

cookiecutter_python.handle.node_interface module

```
class cookiecutter_python.handle.node_interface.Node
    Bases: ABC, Generic[T, TT]
    abstract process(request: T) → TT | None
```

Module contents**cookiecutter_python.hooks package****Submodules****cookiecutter_python.hooks.post_gen_project module**

Post Cookie Hook: Templatized File with jinja2 syntax

Cookiecutter post generation hook script that handles operations after the template project is used to generate a target project.

```
cookiecutter_python.hooks.post_gen_project.CLI_ONLY(x)
cookiecutter_python.hooks.post_gen_project.PYTEST_PLUGIN_ONLY(x)
exception cookiecutter_python.hooks.post_gen_project.PostFileRemovalError
```

Bases: Exception
cookiecutter_python.hooks.post_gen_project.get_context() → OrderedDict

Get the Context, that was used by the Templating Engine at render time
cookiecutter_python.hooks.post_gen_project.get_request()

```
cookiecutter_python.hooks.post_gen_project.git_commit(request)
```

Commit the staged changes in the generated project.
cookiecutter_python.hooks.post_gen_project.initialize_git_repo(project_dir: str)

Initialize the Git repository in the generated project.
cookiecutter_python.hooks.post_gen_project.is_git_repo_clean(project_directory: str) → bool

Check to confirm if the Git repository is clean and has no uncommitted changes. If its clean return True otherwise False.

```
cookiecutter_python.hooks.post_gen_project.iter_files(request)
cookiecutter_python.hooks.post_gen_project.main()
```

Delete irrelevant to Project Type files and optionally do git commit.
cookiecutter_python.hooks.post_gen_project.post_file_removal(request)

Preserve only files relevant to Project Type requested to Generate.
Delete files that are not relevant to the project type requested to generate.
For example, if the user requested a ‘module’ project type, then delete the files that are only relevant to a ‘module+cli’ project.

Parameters

request ([type]) – [description]

```
cookiecutter_python.hooks.post_gen_project.post_hook()
```

Delete irrelevant to Project Type files and optionally do git commit.
cookiecutter_python.hooks.post_gen_project.run_process_python36_n_below(*args, **kwargs)

```
cookiecutter_python.hooks.post_gen_project.run_process_python37_n_above(*args, **kwargs)
cookiecutter_python.hooks.post_gen_project.subprocess_run(*args, **kwargs)
```

cookiecutter_python.hooks.pre_gen_project module

Pre Cookie Hook: Templatized File with jinja2 syntax

```
exception cookiecutter_python.hooks.pre_gen_project.InputSanitizationError
    Bases: Exception
cookiecutter_python.hooks.pre_gen_project.get_request()
cookiecutter_python.hooks.pre_gen_project.hook_main(request)
cookiecutter_python.hooks.pre_gen_project.input_sanitization(request)
cookiecutter_python.hooks.pre_gen_project.main()
```

Module contents

Submodules

cookiecutter_python.cli module

Main *cookiecutter_python* CLI.

```
cookiecutter_python.cli.version_msg()
```

Message about Python Generator version, location and Python version.

cookiecutter_python.cli_handlers module

```
cookiecutter_python.cli_handlers.handle_error(error)
```

cookiecutter_python.exceptions module

```
cookiecutter_python.exceptions.error_2_str(error)
```

cookiecutter_python.utils module

```
cookiecutter_python.utils.load(interface: Type[T], module: str | None = None) → List[Type[T]]
```

Dynamically import all class objects that implement the given interface.

The classes (class objects) are discovered and imported in the namespace, by searching within each module found inside the input ‘dire’ (path) directory.

Each class object is an attribute found in a module’s namespace. We classify an attribute as a (correct) “class to import”, if the following python boolean expression evaluates to True:

isclass(attribute) and issubclass(attribute, interface)

If ‘dire’ is not given then we consider the modules that are inside the same directory as the one where the module of the invoking code resides.

Parameters

- **interface** (*Type[T]*) – the type (ie class) that the imported classes should ‘inherit’ (subclass) from
- **module** (*str*) – module containing the modules to inspect. Defaults to the same module (directory) as the one where the module of the invoking code resides.

Module contents

Developer's Corner

Here we present the **Software Architecture** and offer **Guides** on how to leverage the **CI/CD** to do various Development Operations, in a **GitOps** way.

CI/CD Pipeline

CI/CD Pipeline

Architecture

Software Architecture

Here you can find the software architecture of the project.

Module Dependencies

Here you can find the dependencies between the modules of the project.

The dependencies are Visualized as a Graph, where Nodes are the modules and the Edges are python `import` statements.

The dependencies are visualized, after running the following command:

```
tox -e pydeps
```

First-party Dependencies

All Dependencies - A

All Dependencies - B

All Dependencies - C

GitOps Guides

*How to use our System for **Automated Git Ops**.*

Streamline Documentation Updates

1. Branch off *main* Branch, and checkout your *topical branch* (*tb*).
2. Create Docs-only changes and commit them to your *tb*.
3. Push git tag *quick-release*, to trigger the Docs Release Workflow, on the CI

A new PR, is expected to **open** from *tb* to a *dedicated docs* branch, and automatically **merge** if Docs Build passed on *rtd* CI.

Then, a new PR, is expected to **open** from *dedicated docs* branch to *main*, with extra commits with Sem Ver Bump, and Changelog updates.

4. Wait for second PR to open, go to github web IU to review it, and merge it.

A new **tag** is expected to be created (on the new main/master commit), and a *PyPI* distribution will be uploaded, a new Docker Image on Dockerhub, and a new Github Release will be created.

Workflows References

- `quick-docs.yaml` : Listens to *quick-release* git tag, and merges *tb* → *db*, after opening PR.

Release Candidate / Test Deployment

From your branch, run

```
rc_tag=$(grep -E -o '^version\s*=\s*\\".*\\"' pyproject.toml | cut -d '"' -f2)
rc_tag="${rc_tag}-rc"

git tag "$git_tag" || (git tag -d "$git_tag" && git tag "$git_tag")
git push origin -d "$git_tag"; git push origin "$git_tag"
```

This will, trigger the CI/CD Pipeline and instruct it to do a **Test Deployment**.

Test Deployment is a full deployment of the package to the test environment.

And is the closest thing to a real (production) deployment.

The CI/CD Pipeline will:

1. make wheel builds (and unit test them) for the package using a Job Matrix factoring OS x Py Versions
2. Do as normal measuring of Code Coverage, Static Code Analysis, Docker Build
3. Publish Python Wheel Distribution in Test Environment, at test.pypi.org

Docker Build

Dockerfile - Build Process

1.5 Indices and tables

- genindex
- modindex
- search

PYTHON MODULE INDEX

C

cookiecutter_python, 23
cookiecutter_python.backend, 19
cookiecutter_python.backend.check_server_result, 19
cookiecutter_python.backend.error_handling, 9
cookiecutter_python.backend.error_handling.handler_builder, 8
cookiecutter_python.backend.gen_docs_common, 17
cookiecutter_python.backend.generator, 9
cookiecutter_python.backend.generator.generator, 9
cookiecutter_python.backend.helpers, 17
cookiecutter_python.backend.hosting_services, 15
cookiecutter_python.backend.hosting_services.check_engine, 9
cookiecutter_python.backend.hosting_services.check_service, 10
cookiecutter_python.backend.hosting_services.check_web_hosting_service, 10
cookiecutter_python.backend.hosting_services.checker, 10
cookiecutter_python.backend.hosting_services.checkers, 11
cookiecutter_python.backend.hosting_services.exceptions, 11
cookiecutter_python.backend.hosting_services.extract_name, 11
cookiecutter_python.backend.hosting_services.handle_hosting_service_check, 11
cookiecutter_python.backend.hosting_services.handler, 12
cookiecutter_python.backend.hosting_services.value_extractor, 12
cookiecutter_python.backend.hosting_services.web_hosting_service, 12
cookiecutter_python.backend.load_config, 17
cookiecutter_python.backend.main, 18
cookiecutter_python.backend.post_main, 18
cookiecutter_python.backend.pre_main, 18
cookiecutter_python.backend.proxy, 18
cookiecutter_python.backend.request, 18
cookiecutter_python.backend.sanitization, 17
cookiecutter_python.backend.sanitization.input_sanitization, 16
cookiecutter_python.backend.sanitization.interpreters_support, 16
cookiecutter_python.backend.sanitization.string_sanitizers, 16
cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer, 14
cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input, 15
cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name, 15
cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version, 15
cookiecutter_python.backend.user_config_proxy, 19
cookiecutter_python.cli, 22
cookiecutter_python.cli_handlers, 22
cookiecutter_python.exceptions, 22
cookiecutter_python.handle, 21
cookiecutter_python.handle.dialogs, 20
cookiecutter_python.handle.dialogs.lib, 20
cookiecutter_python.handle.dialogs.lib.project_name, 19
cookiecutter_python.handle.interactive_cli_pipeline, 20
cookiecutter_python.handle.node_base, 20
cookiecutter_python.handle.node_factory, 21
cookiecutter_python.handle.node_interface, 21
cookiecutter_python.hooks, 22
cookiecutter_python.hooks.post_gen_project, 21
cookiecutter_python.hooks.pre_gen_project, 22
cookiecutter_python.utils, 22

INDEX

A

A

AbstractSanitizer (class in cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer), 14
activate_flag (cookiecutter_python.backend.hosting_services.check_service.ServiceChecker attribute), 10
cookiecutter_python.backend.gen_docs_common module, 17

B

BaseProxy (class in cookiecutter_python.backend.proxy), 18
BaseSanitizer (class in cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer), 14
BaseSanitizer (class in cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input), 15
BaseValueExtractor (class in cookiecutter_python.backend.hosting_services.value_extractor), 12
cookiecutter_python.backend.helpers module, 17

C

check (cookiecutter_python.backend.request.Request attribute), 18
check() (cookiecutter_python.backend.hosting_services.check_engine.Engine method), 9
check() (cookiecutter_python.backend.hosting_services.Engine method), 13
check_hosting_service (cookiecutter_python.backend.hosting_services.check_service module, 10)
(cookiecutter_python.backend.hosting_services.handle_hosting_service_check.CheckHostingServiceHandler module, 10)
attribute), 11
check_results (cookiecutter_python.backend.request.Request attribute), 18
Checker (class in cookiecutter_python.backend.hosting_services.checker), 10
checker (cookiecutter_python.backend.hosting_services.check_engine.Engine attribute), 9
checker (cookiecutter_python.backend.hosting_services.Engine attribute), 13
Checkers (class in cookiecutter_python.backend.hosting_services.checkers), 11
checkers (cookiecutter_python.backend.hosting_services.checker.Checker attribute), 10
CheckHostingServiceHandler (class in cookiecutter_python.backend.hosting_services.exceptions module, 11)
cookiecutter_python.backend.hosting_services.handle_hosting_service_check module, 11
CheckHostingServiceResultHandler (class in cookiecutter_python.backend.hosting_services.handler), 12
CheckWebServerError, 18, 19
CheckWebServerResult (class in cookiecutter_python.backend.check_server_result), 17
CLI_ONLY() (in module cookiecutter_python.hooks.post_gen_project), 21
config_file (cookiecutter_python.backend.hosting_services.check_engine.Engine attribute), 9
config_file (cookiecutter_python.backend.hosting_services.checker.Checker attribute), 10
config_file (cookiecutter_python.backend.hosting_services.Engine attribute), 13
config_file (cookiecutter_python.backend.request.Request attribute), 18
config_file_path (cookiecutter_python.backend.hosting_services.check_service.ServiceChecker attribute), 10
ContextVariableDoesNotExist, 11
cookiecutter_python module, 23
cookiecutter_python.backend module, 19
cookiecutter_python.backend.check_server_result module, 17
cookiecutter_python.backend.error_handling module, 9
cookiecutter_python.backend.handler_builder module, 14
cookiecutter_python.backend.generator module, 9
cookiecutter_python.backend.generator_generator module, 15
cookiecutter_python.backend.main module, 18
cookiecutter_python.backend.post_main module, 18
cookiecutter_python.backend.pre_main module, 17

B

B module, 17
BaseProxy (class in cookiecutter_python.backend.proxy), 18 cookiecutter_python.backend.generator
BaseSanitizer (class in cookiecutter_python.backend.sanitization.string_sanitizers.base_sanitizer), 14 module, 9
BaseSanitizer (class in cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_input), 15 cookiecutter_python.backend.generator, generator module, 9
BaseValueExtractor (class in cookiecutter_python.backend.hosting.services.value_extractor), 12 cookiecutter_python.backend.helpers

C

```
cookiecutter_python.backend.hosting_services
check(cookiecutter_python.backend.request.Request attribute), 18 module, 13
check() (cookiecutter_python.backend.hosting_services.check_engine.Engine method) 9
check() (cookiecutter_python.backend.hosting_services.Engine method) 13
check_hosting_service cookiecutter_python.backend.hosting_services.check_service
(cookiecutter_python.backend.hosting_services.handle_hosting_service_check.CheckHostingServiceHandler
attribute), 11
check_web_host cookiecutter_python.backend.hosting_services.check_web_host
check_results(cookiecutter_python.backend.request.Request attribute) 18
Checker(class in cookiecutter_python.backend.hosting_services.checker), 10
checker(cookiecutter_python.backend.hosting_services.check_engine.Engine attribute), 9
checker(cookiecutter_python.backend.hosting_services.Engine attribute) 13
Checkers(class in cookiecutter_python.backend.hosting_services.checkers), 11
checkers(cookiecutter_python.backend.hosting_services.checker.Checker attribute), 10
CheckHostingServiceHandler(class in
cookiecutter_python.backend.hosting_services.handle_hosting_service_check), 11
CheckHostingServiceResultHandler(class in cookiecutter_python.backend.hosting_services.handler), 12
CheckWebServerError, 18, 19
CheckWebServerResult(class in cookiecutter_python.backend.hosting_services.handle_hosting_result), 17
CLI_ONLY() (in module cookiecutter_python.hooks.post_gen_project), 21
config_file(cookiecutter_python.backend.hosting_services.check_engine.Engine attribute), 9
config_file(cookiecutter_python.backend.hosting_services.checker.Checker attribute) 10
config_file(cookiecutter_python.backend.hosting_services.Engine attribute), 13
config_file(cookiecutter_python.backend.hosting_services.Engine attribute), 12
config_file(cookiecutter_python.backend.request.Request attribute), 18
config_file_path(cookiecutter_python.backend.hosting_services.check_service.ServiceChecker attribute), 10
ContextVariableDoesNotExist, 11
cookiecutter_python.cookiecutter_python.backend.load_config
module, 23 module, 17
cookiecutter_python.backend.main
module, 19 module, 18
cookiecutter_python.backend.post_main
cookiecutter_python.backend.check_server_result module, 18
module, 17
cookiecutter_python.backend.pre_main
cookiecutter_python.backend.error_handling
```

```
    module, 18
cookiecutter_python.backend.proxy
    module, 18
cookiecutter_python.backend.request
    module, 18
cookiecutter_python.backend.sanitization
    module, 17
cookiecutter_python.backend.sanitization.interface
    module, 16
cookiecutter_python.backend.sanitization.interface
    module, 16
cookiecutter_python.backend.sanitization.sanitization
    module, 16
cookiecutter_python.backend.sanitization.sanitization
    module, 14
cookiecutter_python.backend.sanitization.sanitization
    module, 15
cookiecutter_python.backend.sanitization.sanitization
    module, 15
cookiecutter_python.backend.user_config_parser
    module, 19
cookiecutter_python.cli
    module, 22
cookiecutter_python.cli_handlers
    module, 22
cookiecutter_python.exceptions
    module, 22
cookiecutter_python.handle
    module, 21
cookiecutter_python.handle.dialogs
    module, 20
cookiecutter_python.handle.dialogs.dialog
    module, 20
cookiecutter_python.handle.dialogs.lib
    module, 20
cookiecutter_python.handle.dialogs.lib.project
    module, 19
cookiecutter_python.handle.interactive_cli
    module, 20
cookiecutter_python.handle.node_base
    module, 20
cookiecutter_python.handle.node_factory
    module, 21
cookiecutter_python.handle.node_interface
    module, 21
cookiecutter_python.hooks
    module, 22
cookiecutter_python.hooks.post_gen_project
    module, 21
cookiecutter_python.hooks.pre_gen_project
    module, 22
cookiecutter_python.utils
```

F

```
from_checkers() (cookiecutter_python.backend.hosting_services.handler)
from_hosting_info() (cookiecutter_python.backend.hosting_services.ch)
from_hosting_info() (cookiecutter_python.backend.hosting_services.ch)
future (cookiecutter python.backend.check server result.CheckWebServer)
```

G

generate() (in module cookiecutter_python.backend), 19
 generate() (in module cookiecutter_python.backend.main), 19
 get_context() (in module cookiecutter_python.hooks.post_gen_project), 21
 get_docs_gen_internal_config() (in module cookiecutter_python.backend), 19
 get_docs_gen_internal_config() (in module cookiecutter_python.hooks.gen_project), 19
 get_interpreters_from_yaml() (in module cookiecutter_python.backend.load_config), 17
 get_request() (in module cookiecutter_python.hooks.post_gen_project), 21
 get_request() (in module cookiecutter_python.hooks.pre_gen_project), 22
 git_commit() (in module cookiecutter_python.hooks.post_gen_project), 21
 main() (in module cookiecutter_python.hooks.pre_gen_project), 22

H

handle() (cookiecutter_python.backend.hosting_services.check_engine.Engine method), 10
 handle() (cookiecutter_python.backend.hosting_services.Engine method), 14
 handle_error() (in module cookiecutter_python.cli_handlers), 10
 HandlerBuilder (class in cookiecutter_python.backend.error_handling), 9
 HandlerBuilder (class in cookiecutter_python.backend.error_handling.handler_builder), 8
 Handlers (class in cookiecutter_python.backend.hosting_services.handlers), 12
 handlers (cookiecutter_python.backend.hosting_services.check_engine.Engine attribute), 10
 handlers (cookiecutter_python.backend.hosting_services.Engine attribute), 14
 handlers (cookiecutter_python.backend.hosting_services.handler.Handlers attribute), 12
 hook_main() (in module cookiecutter_python.hooks.pre_gen_project), 22
 HostingServiceInfo (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12
 HostingServices (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12
 HostingServicesInfo (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12

I

initialize_git_repo() (in module cookiecutter_python.hooks.post_gen_project), 21
 input_sanitization() (in module cookiecutter_python.hooks.pre_gen_project), 22
 InputSanitizationError, 22
 InputValueError, 15
 InteractiveDialog (class in cookiecutter_python.handle.dialogs), 20
 InteractiveDialog (class in cookiecutter_python.handle.dialogs.dialog), 20
 InteractiveDialog (class in cookiecutter_python.handle.dialogs.lib), 20
 InteractiveDialogsPipeline (class in cookiecutter_python.handle.dialogs.lib), 20
 InvalidInterpretersError, 16
 InvalidYamlFormatError, 17
 is_future_response_200()
 (cookiecutter_python.backend.hosting_services.handler.CheckHostingServiceResultHandler static method), 12
 is_git_repo_clean() (in module cookiecutter_python.hooks.post_gen_project), 21
 iter_files() (in module cookiecutter_python.hooks.post_gen_project), 21

K

key_name (cookiecutter_python.backend.hosting_services.value_extractor.BaseValueExtractor attribute), 12
 cookiecutter_python.backend.sanitization.string_sanitizer

L

load() (in module cookiecutter_python.utils), 22
 load_yaml() (in module cookiecutter_python.backend.load_config), 18
 log_info_args() (cookiecutter_python.backend.proxy.BaseProxyAttributeHandler), 18
 log_message() (cookiecutter_python.backend.sanitization.string_sanitizer), 18
 method), 14
 log_message() (cookiecutter_python.backend.sanitization.string_sanitizer), 18
 cookiecutter_python.handle.dialogs, 20

cookiecutter_python.handle.dialogs.dialog, Request (class in cookiecutter_python.backend.request), 18
cookiecutter_python.handle.dialogs.lib, 20 run_process_python36_n_below() (in module cookiecutter_python.hoo
cookiecutter_python.handle.dialogs.lib.projectnames\$19python37_n_above() (in module cookiecutter_python.hoo
cookiecutter_python.handle.interactive_cli_pipeline, 20
cookiecutter_python.handle.node_base, 20 S
cookiecutter_python.handle.node_factory, 21 Sanitize (class in cookiecutter_python.backend.sanitization.input_sanitiz
cookiecutter_python.handle.node_interface, 21 sanitize_module_name() (in module
cookiecutter_python.hooks, 22 cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_mo
cookiecutter_python.hooks.post_gen_project, 21 sanitize_version() (in module cookiecutter_python.backend.sanitizati
cookiecutter_python.hooks.pre_gen_project, 23
cookiecutter_python.utils, 22 SanitizerInterface (class in cookiecutter_python.backend.sanitization.
ModuleNameSanitizer (class in
cookiecutter_python.backend.sanitization.string_sanitizers.sanitizer_registry), 15 backend.hosting_services.web_hosting_ser
N service_name (cookiecutter_python.backend.check_server_result.CheckW
name (cookiecutter_python.backend.check_server_result.CheckW
name_extractor (cookiecutter_python.backend.hosting_service_check_for_criticality).handle_hosting_service_ch
name_extractor (cookiecutter_python.backend.hosting_service_attributes.html_name.NameExtractor attribute), 11
NameExtractor (class in cookiecutter_python.backend.hosting_service_attributes.html_name.NameExtractor attribute), 11
no_input (cookiecutter_python.backend.request.Request attribute), 12
Node (class in cookiecutter_python.handle.node_interface), service_name (cookiecutter_python.backend.hosting_services.web_hostin
NodeFactory (class in cookiecutter_python.handle.node_factory), service_checker (class in cookiecutter_python.backend.hosting_services.
NonCriticalHandlerBuilder (class in cookiecutter_python.backends.info_noncritical_handler_builder), hosting_services.check_eng
O services_info (cookiecutter_python.backends.info_noncritical_handler_builder), hosting_services.check_eng
offline (cookiecutter_python.backend.request.Request attribute), subclasses (cookiecutter_python.backend.error_handling.HandlerBu
P subclasses (cookiecutter_python.backend.error_handling.HandlerBuilder attribute), subclasses (cookiecutter_python.backen
package_name subclasses (cookiecutter_python.handle_dialogs.lib.InteractiveDialog attribute),
(cookiecutter_python.backend.hosting_services.handle_hosting_service_check.CheckHostingServiceHandler),
attribute), 11 subprocess_run() (in module cookiecutter_python.hooks.post_gen_proje
parse_context() (in module cookiecutter_python.backend.helpers), 17
post_file_removal() (in module cookiecutter_python.hooks.post_gen_project), 21
post_hook() (in module cookiecutter_python.hooks.post_gen_project), 21 unsupported_interpreters() (in module cookiecutter_python.backe
post_main() (in module cookiecutter_python.backend.post_main), 18 url_getter
PostFileRemovalError, 21 url_getter
pre_main() (in module cookiecutter_python.backend.pre_main), 18 (cookiecutter_python.backend.hosting_services.check_web_hosting_servic
process() (cookiecutter_python.handle.interactive_cli_pipeline.InteractiveDialogsPipeline method), 20
process() (cookiecutter_python.handle.node_base.DialogNode method), 20 url_pattern (cookiecutter_python.backend.hosting_services.web_hosting
process() (cookiecutter_python.handle.node_interface.Node method), 21 URLGetter (class in cookiecutter_python.backend.hosting_services.web_h
ProjectNameDialog (class in cookiecutter_python.handle.dialogs.lib.project_name), 19 UserYamlDesignError, 19
PyPIServerFactory (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12 V
PYTEST_PLUGIN_ONLY() (in module cookiecutter_python.hooks.post_gen_project), 21 ValueExtractor (class in cookiecutter_python.backend.hosting_servic
R variable_name (cookiecutter_python.backend.hosting_services.web_hosting_service), 12
ReadTheDocsServerFactory (class in cookiecutter_python.backend.hosting_services.web_hosting_service), 12 variable_name (cookiecutter_python.bac
regex 12 variable_name (cookiecutter_python.backend.hosting_services.web_hosting_service), 12
(cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_module_name.ModuleNameSanitizer
attribute), 15 variable_name (cookiecutter_python.backend.hosting_services.web_hosting_service), 12
regex (cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version.VersionSanitizer attribute),
15 verify (cookiecutter_python.backend.sanitization.string_sanitizers.base_s
register_exception() (cookiecutter_python.backend.sanitization.input_sanitization.Sanitize class method), 16 verify (cookiecutter_python.backe
register_sanitizer() (cookiecutter_python.backend.sanitization.input_sanitization.Sanitize class method), 16 verify (cookiecutter_python.backe
register_input_interpreters() (in module cookiecutter_python.backen

`version_msg()` (*in module cookiecutter_python.cli*), 22

`VersionSanitizer` (*class in cookiecutter_python.backend.sanitization.string_sanitizers.sanitize_reg_version*), 15

W

`web_servers` (*cookiecutter_python.backend.request.Request attribute*), 19

`web_service_checker` (*cookiecutter_python.backend.hosting_services.check_service.ServiceChecker attribute*), 10

`WebHostingService` (*class in cookiecutter_python.backend.hosting_services.web_hosting_service*), 13

`WebHostingServiceChecker` (*class in cookiecutter_python.backend.hosting_services.check_web_hosting_service*), 10